

2016

# POWERING PROFESSIONALS SINCE 1898



**AEG**  
POWERTOOLS



**FIXTEC System**

For changing accessories in seconds.

**Keyless Safety Guard**

safety guard adjustment without the use of a tool.

**Impact Driver**

For heavy duty screwdriving applications.

**Anti-Vibration-System**

Significantly reduces vibration by up to 50%.

**Soft Hammer Mode**

Reduces blow energy for increased control.

**Hex 1/4"**

1/4" quick release hex fitment.

**Safety Clutch**

Protects user and machine is a drill bit should jam.

**2-Speed Gear**

2-speed gearbox, for optimum speed to suit application.

**Pendulum Action**

For a faster, more aggressive cut.

**Dust Extraction**

Integrated dust extraction for a clean working environment.

**Drill Only**

Single mode - rotary drilling.

**Kitbox**

Heavy duty kitbox.

**Electronics**

With variable speed pre-selection, soft start, constant speed and overload protection.

**Drill and Hammer Drill**

2 mode - rotary and rotary hammer drilling.

**Kitbag**

Heavy duty kitbag.

**L.E.D.**

For workplace illumination.

**Chisel and Hammer Drill**

2 mode - rotary hammer drill with shipping/demolition function.

**Crosscut Capacity**

Maximum crosscut capacity of saw.

**Metal Chuck**

For enhanced durability.

**Combi Hammer**

3 mode - rotary and rotary drilling with chiseling/demolition function.

**Mitre Capacity**

Maximum mitre angle right and left.

**Rotatable Handle**

Provides optimum comfort during grinding and cutting.

**Chisel Drill**

Chiselling/demolition machine.

**Mitre Saw Blade Laser**

Projects the cut line onto material.

**Diamond System**


Designed for maximum performance when used with diamond accessories.

**Hook and Loop**

Easy sandpaper attachment without clamps.

**Bevel Capacity**

Maximum bevel angle right and left.

**Gears Integrated into Chuck****Cutting Capacity****Bevel Cut Capacity****Belt Clip on the Tool****Cutting Width****Bevel Cut Angle****Max. Cutting Depth****Stroke Length****Sanding Belt Length**

# CONTENTS

**AEG POWERTOOLS** promises to draw upon its heritage and deliver exciting, high performance, innovative working solutions for the professional tradesmen of today and the future.

**CORDLESS SYSTEMS**

Omnipro	10 – 11
18 V Power	12 – 21
14,4 V Power	22 – 23
12 V Power	24 – 28
3,6 V Power	28 – 28
Test and Measurement	29 – 29
Pro Lithium Technology	30 – 31

**HAMMER SYSTEMS**

Rotary Hammer	34 – 34
Combi Hammers	35 – 37
Chipping Hammers	37 – 37
Large Demolition Hammers	38 – 40

**DRILLING SYSTEMS**

Rotary Drill	44 – 44
Percussion Drills	45 – 47
Wall Chaser	48 – 48
Diamond Drill	48 – 48
Screwdrivers	49 – 49

**METALWORKING**

Small Angle Grinders	56 – 56
Large Angle Grinders	56 – 58
Die Grinders	59 – 60
Polisher	60 – 60
Right Angle Sander	61 – 61
Metal Chopsaw	61 – 61

**WOODWORKING**

Circular Saws	64 – 64
Jigsaws	65 – 68
Router	68 – 69
Planer	69 – 69
Reciprocating Saws	70 – 70
Sanders	71 – 73
Heat Guns	74 – 74
Table Saw	75 – 75
Mitre Saws	76 – 77
Mitre Saw Legstand	77 – 77
Dust Extraction	78 – 79

**ACCESSORIES**

80 – 95



For more information please visit  
[www.aeg-powertools.eu/warranty](http://www.aeg-powertools.eu/warranty)



**AEG**  
POWERTOOLS

# POWERING PROFESSIONALS SINCE 1898



Since being founded in 1891, AEG POWERTOOLS has been leading the way in new product development. By introducing the first transportable drilling machines in 1898, portable powertools were born. Over 100 years later AEG are still offering the professional user innovative, powerful solutions...

**PROUD PAST...  
EXCITING FUTURE...**



# CORDLESS RANGE

## INNOVATIVE CORDLESS SOLUTIONS FOR TOUGH CONDITIONS

**AEG POWERTOOLS** offer the power to drill deeper with their powerful range of percussion drills offering enhanced performance, reliability and durability for today's professional user.

**AEG**  
POWERTOOLS





# PRO 18v

# AEG

POWERTOOLS

A COMPLETE  
RANGE OF  
PROFESSIONAL  
TOOLS  
POWERED BY  
ONE BATTERY



PRO LiTHIUM  
ION



3 BODIES  
7 HEADS

100+ APPLICATIONS

CHOOSE  
YOUR  
SYSTEM

All **heads** and **bodies** are inter-changeable

**AEG**  
POWERTOOLS



ONE SYSTEM  
OMNI PRO is a revolutionary system allowing users to tailor their system depending on application. All heads and bodies are interchangeable to select the best balance of power base and head for ultimate productivity.

OMNI 12C

- Features**
- Offers users the ultimate in ergonomics. The light weight, compact body is ideal for working in tight spaces
  - Tool free interchangeable heads to easily switch between a wide range of applications
  - Large 2 finger switch with adjustable speed
  - One handed use of applications
  - Small and compact for working in tight environments
  - LED light with twilight mode for a precise work even in the darkest area

Specifications	OMNI 12C
Voltage (V)	12
Oscillation rate (opm)	20,000
Oscillation angle left/ right (°)	1.5
Article Number	4935440765
EAN Code	4002395134809



OMNI 18C

- Features**
- Gives more power and more runtime than the 12 V power base, whilst keeping the advantage of cordless portability
  - Tool free interchangeable heads to easily switch between a wide range of applications
  - Large 2 finger switch with adjustable speed
  - One handed use of applications
  - Optimum power to weight ratio
  - LED for work place illumination
  - Built in fuel gauge
  - Slim design handle for perfect ergonomics and a better vibration absorption

Specification	OMNI 18C
Voltage (V)	18
Oscillation rate (opm)	20,000
Oscillation angle left/ right (°)	1.5
Article Number	4935440645
EAN Code	4002395134649



OMNI 300

- Features**
- It is the choice for longer applications where a cordless machine is not required, with all the power expected from an AC machine
  - Tool free interchangeable heads to easily switch between a wide range of applications
  - Large 2 finger switch with adjustable speed
  - One handed use of applications
  - LED for work place illumination
  - Mains machine

Specification	OMNI 300
Power input (W)	300
Oscillation rate (opm)	20,000
Oscillation angle left/ right (°)	1.5
Article Number	4935431790
EAN Code	4002395194995



**RATCHED HEAD**  
OMNI-IR  
Article No. 4935440720  
EAN No. 4002395134755



**IMPACT DRIVER HEAD**  
OMNI-IH  
Article No. 4935440730  
EAN No. 4002395134779



**RIGHT ANGLE DRILL HEAD**  
OMNI-RAD  
Article No. 4935440705  
EAN No. 4002395134724

**MULTITOOL HEAD**  
OMNI-MT  
Article No. 4935440700  
EAN No. 4002395134717

**JIGSAW HEAD**  
OMNI-JS  
Article No. 4935440715  
EAN No. 4002395134748



**ROTARY TOOL HEAD**  
OMNI-RT  
Article No. 4935451311  
EAN No. 4002395151295



**RECIPROCATING SAW HEAD**  
OMNI-RH  
Article No. 4935440725  
EAN No. 4002395134762






BRUSHLESS HAMMERDRILL DRIVER

Features

- New AEG Brushless Hammerdrill driver
- Compact and powerful for every jobsite application
- Only 151mm without the chuck and with chuck 193mm in length makes the shortest Brushless in the market
- 60 Nm with a (2.0Ah) / 75 Nm with a (4.0Ah) battery for maximum torque which delivers complete power
- 2 - speed 0-550 / 0-2100 rpm
- Removable 13mm ratchet chuck for the heaviest applications
- ¼" HEX reception under the chuck, 25mm screwdriving bit can be hold in the reception while the chuck is mounted
- Offset and right angle delivering the same performance as the tool it self, no more need to cope with torque level or drilling speed and you can place them in 12 different positions. Offset and right angle attachment are sold as accessories
- New microtexture overmould for the best handling on the market
- LED light on the foot print to illuminate the work surface
- 3 mode selector - ease of use between applications
- Features AEG Pro Lithium-Ion technology with overload protection for maximum durability of battery and tool
- Supplied with a side handle and a 13mm removable chuck

Specifications

	BSB 18CBL LI-402C	BSB 18CBL LI-202C	BSB 18CBL-0
Battery type	Li-ion	Li-ion	-
Battery pack capacity (Ah)	4.0	2.0	18
No. of batteries supplied	2	2	0
Charger supplied	80 min	40 min	-
Max. drilling wood/ steel/ masonry (mm)	45/13/14	45/13/14	45/13/14
Chuck capacity (mm)	1.5-13	1.5-13	1.5-13
Max. torque (Nm)	75	60	-
No load speed (rpm)	0 - 550 / 0 - 2100	0 - 550/0 - 2100	0-550 / 0-2100
Max. percussion rate (bpm)	7.150 / 27.300	7.150 / 27.300	7.150 / 27.300
Weight with battery pack (kg)	2.1	1.8	-
Supplied in	Kitbox	Kitbox	-
Article Number	4935448463	4935448462	4935451082
EAN Code	4002395259373	4002395259366	4002395811083

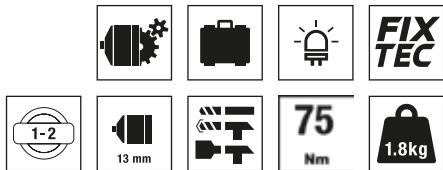

Right Angle Attachment  
Article Number  
4932430923

Right Angle Attachment  
Article Number  
4932430924




BRUSHLESS DRILL DRIVER

Features

- New AEG Brushless drill driver
- Compact and powerful for every jobsite application
- Only 176mm in length for an extremely compact and perfect balanced drill driver
- 60 Nm with a (2.0 Ah) / 75 Nm with a (4.0 Ah) battery for maximum torque delivers complete power
- 2 - speeds - 0-550 / 0-2100 rpm
- 13 mm ratchet chuck for withstanding the heaviest application and a perfect torque transmission to the accessory
- New microtexture overmould for the best handling on the market
- LED light on the foot print to illuminate the work surface
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool
- Supplied with a side handle

Specifications

	BS 18CBL LI-202C
Battery type	Li-ion
Battery pack capacity (Ah)	2.0
No. of batteries supplied	2
Charger supplied	40 min
Max. drilling wood/ steel/ masonry (mm)	45/13/14
Chuck capacity (mm)	1.5-13
Max. torque (Nm)	60
No load speed (rpm)	0-550 / 0-2100
Weight with battery pack (kg)	1.8
Supplied in	Kitbox
Article Number	4935448768
EAN Code	4002395294572

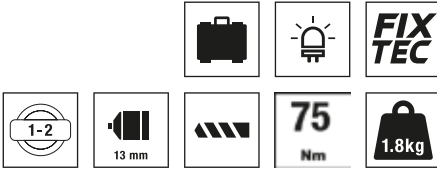


18 V PREMIUM HAMMERDRILL/DRIVER

Features

- New high performance open frame motor
- Compact & powerful for high torque applications
- 80 Nm maximum torque delivers complete power
- Full metal gearbox and housing for superior durability
- 2-speeds – 0-450 / 0-1600 rpm
- 24 stage torque adjustment for complete control
- FIXTEC 13 mm full metal Rohm keyless chuck, with spindle lock
- LED - for work place illumination
- 3 mode selector – ease of use between applications
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool
- Supplied with a side handle

Specifications

	BSB 18 LI-402C
Battery type	Li-ion
Battery pack capacity (Ah)	4.0
No. of batteries supplied	2
Charger supplied	80 min
Max. drilling wood/ steel/ masonry (mm)	55/13/16
Chuck capacity (mm)	1.5-13
Max. torque (Nm)	80
No load speed (rpm)	0 - 450/0 - 1600
Max. percussion rate (bpm)	7.200 - 25.600
Weight with battery pack (kg)	2.5
Supplied in	Kitbox
Article Number	4935443452
EAN Code	4002395135769

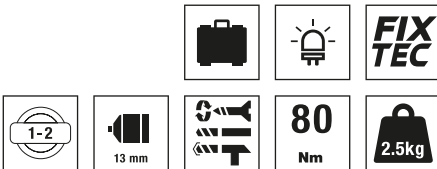



18 V COMPACT HAMMERDRILL/DRIVER

PRO 18v


BSB 18C

Features

- New 4 poles frameless motor and compact gear box
- Compact & powerful for high torque applications
- Only 202 mm in length
- 60 Nm (2.0 Ah) / 70 Nm (4.0 Ah) maximum torque delivers complete power
- 2-speeds – 0-450 / 0-1650 rpm
- 24 stage torque adjustment for complete control
- FIXTEC 13 mm keyless chuck, with spindle lock
- LED - for work place illumination
- 3 mode selector – ease of use between applications
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool
- Supplied with a side handle

Specifications

	BSB 18C Li-202C	BSB 18C Li-402C
Battery type	Li-ion	Li-ion
Battery pack capacity (Ah)	2.0	4.0
No. of batteries supplied	2	2
Charger supplied	40 min	80 min
Max. drilling wood/ steel/ masonry (mm)	45/13/14	45/13/14
Chuck capacity (mm)	1.5-13	1.5-13
Max. torque (Nm)	60	70
No load speed (rpm)	0 - 450/0 - 1650	0 - 450/0 - 1650
Max. percussion rate (bpm)	21.450	21.450
Weight with battery pack (kg)	1.9	2.2
Supplied in	Kitbox	Kitbox
Article Number	4935443980	4935443997
EAN Code	4002395135684	4002395135745

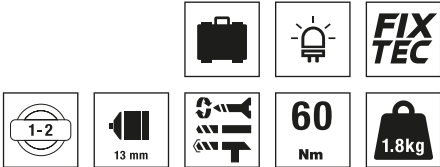

18 V COMPACT DRILL/DRIVER

PRO 18v

BS 18C

Features

- New 4 poles frameless motor and compact gearbox
- Small, compact & powerful for high torque applications
- Only 186 mm in length
- 60 Nm (2.0 Ah) / 70 Nm (4.0 Ah) maximum torque delivers complete power
- 2 - speeds - 0-450 / 0-1650 rpm
- Integrated clutch and chuck for a more compact design
- LED for work place illumination
- Forward and reverse
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool
- Supplied with a double ended bit and a side handle

Specifications

	BS 18C Li-202C	BS 18C Li-402C
Battery type	Li-ion	Li-ion
Battery pack capacity (Ah)	2.0	4.0
No. of batteries supplied	2	2
Charger supplied	40 min	80 min
Max. drilling wood/ steel (mm)	45/13	45/13
Chuck capacity (mm)	13	13
Max. torque (Nm)	60	70
No load speed (rpm)	0 - 450 / 0 - 1650	0 - 450 / 0 - 1650
Weight with battery pack (kg)	1.8	2.0
Supplied in	Kitbox	Kitbox
Article Number	4935443977	4935443994
EAN Code	4002395135677	4002395135738



For further technical specifications, including noise and vibration data, please visit our website: [www.aeg-powertools.com](http://www.aeg-powertools.com)

18 V CORDLESS SDS-PLUS ROTARY HAMMER

PRO 18v

BBH 18

Features

- L-shape SDS hammer for drilling and fixing into concrete up to 24 mm
- 2.3 Joule impact energy delivers high performance
- Rotary stop for light chiselling applications
- Hammer action stop for rotary drilling in wood and metal
- Metal gearbox for extended durability
- Safety clutch for user protection
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool

Specifications

	BBH18-0	BBH 18 Li-402C
Battery type	Li-ion	Li-ion
Battery pack capacity (Ah)	–	4.0
No. of batteries supplied	0	2
Charger supplied	–	80 min
Max. drilling wood/ steel/ concrete (mm)	30/13/24	30/13/24
Blow energy (EPTA)(J)	2.3	2.3
No load speed (rpm)	1400	1400
Full load hammer action (bpm)	0 - 4200	0 - 4200
Weight with battery pack (kg)	–	3.5
Supplied in	–	Kitbox
Article Number	4935408330	4935443457
EAN Code	4002395132744	4002395135783



18 V DRILL/DRIVER

PRO 18v


BS 18G2

Features

- Compact & powerful for completion of all jobsite applications
- 50 Nm maximum torque delivers complete power
- 2 speeds - 0 - 400 / 0 - 1500 rpm
- 24 stage torque adjustment for complete control
- FIXTEC 13 mm single sleeve full metal chuck
- Built in fuel gauge
- LED - for work place illumination
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of both battery and tool

Specifications

	BS 18G2 Li-152C
Battery type	Li-ion
Battery pack capacity (Ah)	1.5
No. of batteries supplied	2
Charger supplied	30 min
Max. drilling wood/ steel (mm)	34/13
Chuck capacity (mm)	1.5 - 13
Max. torque (Nm)	50
No load speed (rpm)	0 - 400/0 - 1500
Weight with battery pack (kg)	1.8
Supplied in	Kitbox
Article Number	4935433950
EAN Code	4002395134441

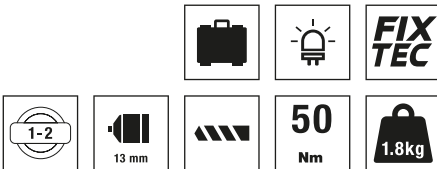

For further technical specifications, including noise and vibration data, please visit our website: [www.aeg-powertools.com](http://www.aeg-powertools.com)



18 V HAMMERDRILL/DRIVER


Features

- Compact & powerful for completion of all jobsite applications
- 50 Nm maximum torque delivers complete power
- 2 speeds - 0-400 / 0-1500 rpm
- 24 stage torque adjustment for complete control
- FIXTEC 13 mm single sleeve full metal chuck
- 3 mode selector - ease of use between functions
- Built in fuel gauge
- LED - for work place illumination
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of both battery and tool

Specifications

	BSB 18G2 LI-152C
Battery type	Li-ion
Battery pack capacity (Ah)	1.5
No. of batteries supplied	2
Max. drilling wood/ steel/ masonry (mm)	34/13/12
Chuck capacity (mm)	1.5-13
Max. torque (Nm)	50
No load speed (rpm)	0 - 400/0 - 1500
Weight with battery pack (kg)	1.9
Supplied in	Kitbox
Article Number	4935433970
EAN Code	4002395134489

PRO18vBSB 18G2

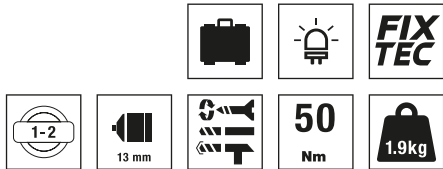

18 V ULTRA COMPACT IMPACT DRIVER

Features

- Ultra compact, well balanced impact driver
- Only 203 mm overall length
- 360 Nm maximum torque
- Delivers 0–3200 impacts per minute for increased productivity
- Industrial metal gearbox and gears for extended life
- ½” Square reception and delivered with ¼” hex adaptor for screwdriving
- Built in Triple LED for perfect illumination of the work surface without any shadow effect

Specifications

	BSS 18C 12Z-0	BSS 18C 12Z Li-402C
Battery type	Li-ion	Li-ion
Battery pack capacity (Ah)	-	4.0
No. of batteries supplied	0	2
Charger supplied	-	80 min
Max. torque (Nm)	360	360
No load speed (rpm)	0 - 2900	0 - 2900
Impact rate (ipm)	0 - 3200	0 - 3200
Tool reception	½” square	½” square
Weight with battery pack (kg)	-	2.3
Supplied in	-	Kitbox
Article Number	4935446449	4935446456
EAN Code	4002395136247	4002395136254

PRO18vBSS 18C 12Z



18 V ULTRA COMPACT IMPACT DRIVER

Features

- Ultra compact, well balanced impact driver
- Only 145 mm overall length
- 158 Nm maximum torque
- Delivers up to 3100 impacts per minute for increased productivity
- Industrial metal gearbox and gears for extended life
- ¼” Hex bit reception
- Built in LED illuminates work surface
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool
- Supplied with a single PZ2 bit

Specifications

	BSS 18C-0
Battery type	Li-ion
Battery pack capacity (Ah)	-
Max. torque (Nm)	190
No load speed (rpm)	0 - 2400
Impact rate (ipm)	0 - 3100
Tool reception	¼” Hex
Weight with battery pack (kg)	1.56
Supplied in	-
Article Number	4935428405
EAN Code	4002395132140

PRO18vBSS 18C



18 V HEAVY DUTY ANGLE GRINDER


Features

- Compact and powerful cordless angle grinder
- Overload protection with LED warning
- AVS side handle for comfort and safety
- Burst resistant keyless safety guard for easy and fast guard adjustment
- Fast and tool-free disc change with patented FIXTEC nut
- Built in fuel gauge
- AEG Pro Lithium-Ion battery technology for maximum durability of battery and tool
- Supplied with a FIXTEC nut, flange nut, AVS side handle and a grinding keyless guard

Specifications

	BEWS 18-115X-0	BEWS 18-115X Li-402C
Battery type	-	Li-ion
Battery pack capacity (Ah)	-	4.0
No. of batteries supplied	0	2
Charger supplied	-	80 min
No load speed (rpm)	9.000	9.000
Max. cutting depth (mm)	28	28
Spindle size	M14	M14
Weight with battery pack (kg)	-	2.5
Supplied in	-	Kitbox
Article Number	4935433319	4935443463
EAN Code	4002395133222	4002395136001

PRO18vBEWS 18-115

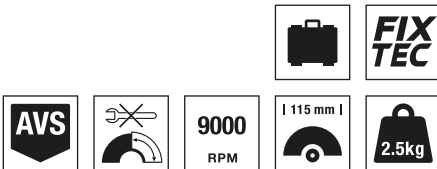



18 V HEAVY DUTY ANGLE GRINDER

PRO 18v BEWS 18-125


Features

- Compact and powerful cordless angle grinder
- Overload protection with LED warning
- AVS side handle for comfort and safety
- Burst resistant keyless safety guard for easy and fast guard adjustment
- Fast and tool-free disc change with patented FIXTEC nut
- Built in fuel gauge
- AEG Pro Lithium-Ion battery technology for maximum durability of battery and tool
- Supplied with a FIXTEC nut, flange nut, AVS side handle and a grinding keyless guard



Specifications

	BEWS 18-125X-0	BEWS 18-125X Li-402C
Battery type	Li-ion	Li-ion
Battery pack capacity (Ah)	–	4.0
No. of batteries supplied	0	2
Charger supplied	–	80 min
No load speed (rpm)	9.000	9.000
Max. cutting depth (mm)	33	33
Spindle size	M14	M14
Weight with battery pack (kg)	–	2.6
Supplied in	–	Kitbox
Article Number	4935431998	4935443460
EAN Code	4002395132980	4002395135790

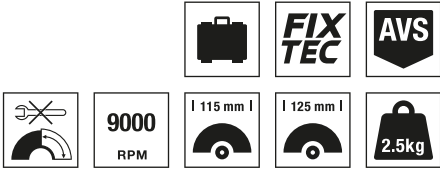

18 V HEAVY DUTY CIRCULAR SAW

PRO 18v BKS 18

Features

- Compact, light and well balanced
- Extremely fast cutting speed of 5000 rpm
- Magnesium base and upper guard for durability
- Large 50° bevel capacity
- Electronic motor brake, saw blade stops within seconds
- Lock off switch for safety
- Spindle lock for fast blade changing
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool
- Supplied with a 165 mm TCT blade and a side fence



Specifications

	BKS 18-0
Battery type	Li-ion
Blade diameter (mm)	165
Arbor size (mm)	15.87 mm (5/8")
Bevel capacity (°)	50°
No load speed (rpm)	0 - 5000
Max. cutting depth 45/90° (mm)	41/54
Weight with battery pack (kg)	3.4
Supplied in	–
Article Number	4935431375
EAN Code	4002395132812



For further technical specifications, including noise and vibration data, please visit our website: [www.aeg-powertools.com](http://www.aeg-powertools.com)

18 V PENDULUM ACTION RECIPROCATING SAW

PRO 18v BUS 18


Features

- Pendulum action for increased performance
- 3600 strokes per minute and 19 mm stroke length for fast cutting applications
- Robust bladeclamp for demolition applications
- FIXTEC for fast and easy keyless blade change
- Adjustable shoe
- Saw blade can be turned 180° for various applications
- Variable speed trigger
- Soft-grip
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool
- Supplied with 2 blades



Specifications

	BUS 18-0
Battery type	Li-ion
No. of batteries supplied	0
No load stroke rate (spm)	0 - 3600
Weight with battery pack (kg)	3.5
Supplied in	–
Article Number	4935431370
EAN Code	4002395132805

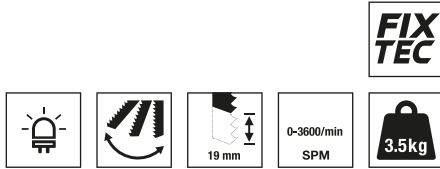

ORBITAL SANDER

PRO 18v BEX18-125


Features

- Powerfull 18V motor 125mm random orbital sander
- Ideal for working in confined spaces and overhead
- Variable speed for optimum control
- Convenient hook & loop paper fastening
- Very efficient dust extraction, over 8 holes in the base plate
- Dust extraction, with dust bag or absorption system
- Micro texture grip for perfect handling
- Supplied with dust bag and sanding paper



Specifications

	BEX18-125 - 0	BEX18-125 Li-402C
Battery type	Li-ion	Li-ion
Battery pack capacity (Ah)	-	4.0
No. of batteries supplied	0	2
Charger supplied	–	80 min
No load speed (rpm)	7.000 - 11.000	7.000 - 11.000
Oscillation rate (opm)	14.000 - 22.000	14.000 - 22.000
Oscillation diameter (mm)	2.4	2.4
Sanding pad size (mm)	125	125
Weight with battery pack (kg)	-	2.1
Article Number	4935451086	4935451087
EAN Code	4002395811120	4002395811137



For further technical specifications, including noise and vibration data, please visit our website: [www.aeg-powertools.com](http://www.aeg-powertools.com)



18 V HEAVY DUTY JIGSAW

PRO 18v

BST 18X

Features

- Pendulum action for increased cutting performance
- Metal gearbox for extended durability
- Professional, die-cast aluminium base plate
- Patented FIXTEC system for fast keyless blade change
- Variable speed trigger
- Ergonomic soft-grip for comfortable use
- Electronic motor brake
- Supplied with a plastic shoe cover, an anti splintering device and 2 blades



Specifications

	BST 18X-0
Battery type	Li-ion
Stroke length (mm)	26
No load stroke rate (spm)	0 - 2050
Bevel capacity (°)	45°
Max. cutting capacity soft wood (mm)	80
Weight with battery pack (kg)	3.5
Supplied in	-
Article Number	4935413130
EAN Code	4002395197460



18V CORDLESS PLANER

PRO 18v

BHO 18

Features

- Additional front handle with soft grip for convenient two-hand working
- Large dust bag for a dust free working area
- Adjustment switch for easy adjustment of the cutting depth
- Front and rear shoe have a v-groove for easy chamfer cutting
- Automatic Kickstand to protect surfaces from accidental planer contact
- Lock off switch for safety
- Ergonomic handle design with large soft-grip area for maximum comfort
- Die-cast base plate for high durability



Specifications

	BHO 18-0
Battery type	Li-ion
Battery pack capacity (Ah)	-
No. of batteries supplied	0
No load speed (rpm)	12.000
Planing depth (mm)	0 - 1.6
Planing width (mm)	82
Rebate depth (mm)	0 - 12.5
Weight with battery pack (kg)	-
Supplied in	-
Article Number	4935413175
EAN Code	4002395197552



JOBSITE RADIO

PRO 18v

BR 18C

Features

- FM AM tuner
- Aux mode for MP3 player or smartphone
- Suitable for 18V 1,5Ah / 2,0Ah / 3,0Ah and 4,0Ah pack
- IP54 for outdoor usage
- Shock resistant construction to withstand the Jobsite abuses



Specifications

	BR 18C-0
Voltage (V)	18
Weight without battery pack (kg)	0.8
Article Number	4935447634
EAN Code	4002395294251



FLASHLIGHTS / BATTERY LAMPS

PRO 18v

BAL 18

Features

- Compact directional light source for confined spaces.
- LED light with 2 sources, directional spot or area light
- Clip for hanging or mounting



Specifications

	BAL 18
Voltage (V)	18
Weight without battery pack (kg)	0.3
Article Number	4932352661
EAN Code	4002395373192





14.4 V COMPACT HAMMERDRILL/DRIVER


PRO Li<sup>THIUM</sup> ION BSB 14C

Features

- 3 mode selector
- Powerful new frameless motor delivering 50 Nm maximum torque
- 2 speeds - 0-400 / 0-1500 rpm
- FIXTEC 13 mm keyless chuck
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool

Specifications

	BSB 14C LI-202C
Battery type	Li-ion
Battery pack capacity (Ah)	2.0
No. of batteries supplied	2
Charger supplied	40 min
Max. drilling wood/ steel/ masonry (mm)	45/13/14
Max. percussion rate (bpm)	19.500
Chuck capacity (mm)	1.5 - 13
Max. torque (Nm)	50
No load speed (rpm)	0 - 400/0 - 1500
Weight with battery pack (kg)	1.8
Supplied in	Kitbox
Article Number	4935443974
EAN Code	4002395136025

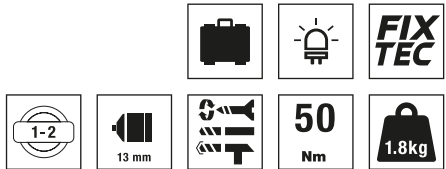

14.4 V COMPACT DRILL/DRIVER


PRO Li<sup>THIUM</sup> ION BS 14C

Features

- Ultra compact drill/driver measuring 186 mm in length
- Powerful new frameless motor delivering 50 Nm maximum torque
- 2 speeds 0-400 / 0-1500 rpm
- FIXTEC 13 mm keyless chuck
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool

Specifications

	BS 14C LI-202C
Battery type	Li-ion
Battery pack capacity (Ah)	2.0
No. of batteries supplied	2
Charger supplied	40 min
Max. drilling wood/ steel (mm)	45/13
Chuck capacity (mm)	1.5-13 mm
Max. torque (Nm)	50
No load speed (rpm)	0 - 400 / 0 - 1500
Weight with battery pack (kg)	1.7
Supplied in	Kitbox
Article Number	4935443971
EAN Code	4002395135653

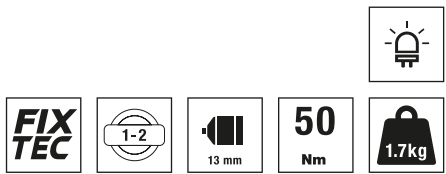

For further technical specifications, including noise and vibration data, please visit our website: [www.aeg-powertools.com](http://www.aeg-powertools.com)

14.4 V HAMMERDRILL/DRIVER


PRO Li<sup>THIUM</sup> ION BSB 14G2

Features

- Compact & powerful for completion of all jobsite applications
- 36 Nm maximum torque delivers complete power (32 Nm NiCd)
- 2 speeds 0-400 / 0-1500 rpm (0-1400 rpm NiCd)
- 24-stage torque adjustment
- FIXTEC 13 mm single sleeve chuck with full metal jaws (10 mm NiCd)
- 3 mode selector - ease of use between functions
- LED - for work place illumination ( lithium version only)
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool\*

Specifications

	BSB 14G2 LI-152C	BSB 14G2 NC-142C
Battery type	Li-ion	NiCd
Battery pack capacity (Ah)	1.5	1.4
No. of batteries supplied	2	2
Charger supplied	30 min	25 min
Max. drilling wood/ steel/ masonry (mm)	32/13/8	30/10/8
Max. percussion rate (bpm)	22.250	21.000
Chuck capacity (mm)	1.5 - 13	10
Max. torque (Nm)	36	32
No load speed (rpm)	0 - 400/0 - 1500	0 - 400/0 - 1400
Weight with battery pack (kg)	1.8	1.8
Supplied in	Kitbox	Kitbox
Article Number	4935431990	4935431989
EAN Code	4002395132997	4002395195107

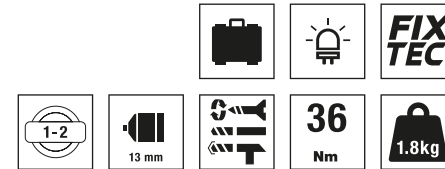

14.4 V DRILL/DRIVER


PRO Li<sup>THIUM</sup> ION BS 14G2

Features

- Compact & powerful for completion of all jobsite applications
- 36 Nm maximum torque delivers complete power (32 Nm NiCd)
- 2 speeds 0-400 / 0-1500 rpm (0-1400 rpm NiCd)
- 24 stage torque adjustment for complete control
- FIXTEC 13 mm single sleeve chuck with full metal jaws (10 mm NiCd)
- Built in fuel gauge
- LED - for work place illumination ( lithium version only)
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool\*

Specifications

	BS 14G2 LI-152C	BS 14G2 NC-142C
Battery type	Li-ion	NiCd
Battery pack capacity (Ah)	1.5	1.4
No. of batteries supplied	2	2
Charger supplied	30 min	25 min
Max. drilling wood/ steel (mm)	32/13	30/10
Chuck capacity (mm)	1.5 - 13	10
Max. torque (Nm)	36	32
No load speed (rpm)	0 - 400 / 0 - 1500	0 - 400 / 0 - 1400
Weight with battery pack (kg)	1.7	1.7
Supplied in	Kitbox	Kitbox
Article Number	4935431988	4935431987
EAN Code	4002395195084	4002395195077

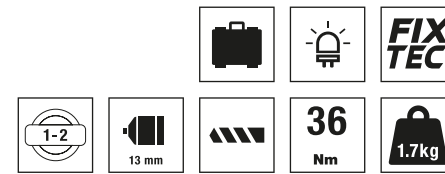

For further technical specifications, including noise and vibration data, please visit our website: [www.aeg-powertools.com](http://www.aeg-powertools.com)

\* Lithium-Ion products only



12 V 2-SPEED DRILL DRIVER

PRO Li<sup>THIUM</sup> ION


BBS 12C2

Features

- Removable chuck system allows user to keep a 25 mm screwdriving bit in the reception when the chuck is installed
- Extremely compact percussion drill - 192 mm length with the chuck / 155 mm without
- LED light with twilight mode - allows to work in tight and confine spacesLED light with twilight mode - allows to work in tight and confine spaces
- Belt clip for easy carriage
- Built in fuel gauge
- High torque - 32 Nm for a wide range of applications
- Offset and right angle attachments delivering the same performance as the tool itself, no more need to cope with torque level or drilling speed
- Full metal planetary gears and gear housing for maximum durability
- Compatible & Versatile
- Possible to fix the chuck on the right angle attachment in order to have a right angle drill
- Ideal for all application in series that required pre-drilling
- - 25 mm screw driving bit can be let in the reception when the attachment is installed
- - Once the hole drilled, then just pull the chuck out to drive your screw. No more need of 2 drills!

Specifications

	BBS 12C2 LI-202B	BBS 12C2 LI-202C KIT 1
Battery type	Li-ion	Li-ion
Battery pack capacity (Ah)	2.0	2.0
No. of batteries supplied	2	2
Charger supplied	50 min	50 min
Max. drilling wood/ steel (mm)	20/10	20/10
Max. torque (Nm)	32	32
No load speed (rpm)	0 - 400/0 - 1500	0 - 400/0 - 1500
Standard equipment	Removable chuck, screwdriving bit, belt clip	Removable chuck, chuck offset attachment, screwdriving bit, belt clip
Weight with battery pack (kg)	1.2	1.2
Supplied in	Tool bag	Kitbox
Article Number	4935446693	4935446382
EAN Code	4002395136377	4002395136131

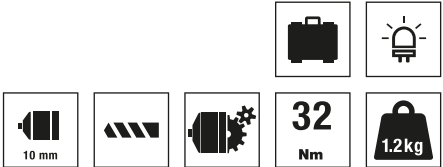

12 V 2-SPPED ULTRA COMPACT PERCUSSION DRILL

PRO Li<sup>THIUM</sup> ION


BSB 12C2

Features

- Compact hammer drill/driver measuring only 192 mm
- Built in fuel gauge
- Belt clip
- 2-speed gearbox for a wide range of applications
- Industrial metal gearbox and gears for superior durability
- FIXTEC spindle lock and keyless 10 mm chuck
- Electronic switch with variable speed
- 3 mode selector - ease of use between applications
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool
- Powerfull Torque of 32 Nm (2.0Ah) / 40 Nm (4.0Ah) for all driving applications

Specifications

	BSB 12C2 LI-202B	BSB 12C2 LI-402B
Battery type	Li-ion	Li-ion
Battery pack capacity (Ah)	2.0	4.0
No. of batteries supplied	2	2
Charger supplied	50 min	100 min
Max. drilling wood/ steel/ masonry (mm)	20/10/10	20/10/10
Max. percussion rate (bpm)	22.500	22.500
Chuck capacity (mm)	10	10
Max. torque (Nm)	32	40
No load speed (rpm)	0 - 400/0 - 1500	0 - 400/0 - 1500
Weight with battery pack (kg)	1.2	1.4
Supplied in	Tool bag	Tool bag
Article Number	4935443964	4935446696
EAN Code	4002395135622	4002395136384

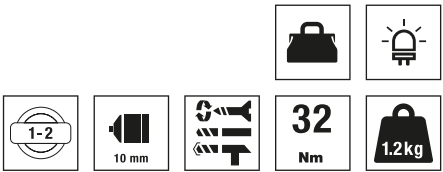

For further technical specifications, including noise and vibration data, please visit our website: [www.aeg-powertools.com](http://www.aeg-powertools.com)

NEW COMPACT SCREWDRIVER

PRO Li<sup>THIUM</sup> ION


BS 12C2 NEW

Features

- New compact screwdriver
- 17-stage torque adjustment plus additional drilling stage
- 2-speed gearbox for a wide range of applications
- Built in fuel gauge
- Belt clip
- FIXTEC spindle lock on keyless 10mm chuck
- Electronic switch with variable speed
- Built in LED light illuminates the work surface
- Features AEG Pro-Lithium-Ion battery technology with overload protection for maximum durability of battery and tool

Specifications

	BS12C2 LI-152B	BS12C2 LI-202B	BS 12C2 LI-202C
Battery type	Li-ion	Li-ion	Li-ion
Battery pack capacity (Ah)	1.5	2.0	2.0
No. of batteries supplied	2	2	2
Charger supplied	30 min	30 min	50 min
Max. drilling wood (mm)	20	20	20
Max. drilling steel (mm)	10	10	10
Max. torque (Nm)	34	34	34
No load speed (rpm)	0 - 350/0 - 1500	0 - 350/0 - 1500	0 - 350/0 - 1500
Weight with battery pack (kg)	1.1	1.1	1.1
Supplied in	Tool bag	Tool bag	Kitbox
Article Number	4935448464	4935448465	4935443916
EAN Code	4002395259380	4002395259397	4002395135585

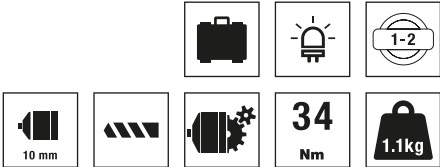

12 V ULTRA COMPACT DRILL/DRIVER

PRO Li<sup>THIUM</sup> ION


BS 12C

Features

- Compact pocket drill/screwdriver measuring only 161 mm
- Built in fuel gauge
- 17-stage torque adjustment plus additional drilling stage
- Industrial metal gearbox and gears for superior durability
- FIXTEC spindle lock and keyless 10 mm chuck
- Electronic switch with variable speed
- Built in LED light illuminates the work surfaces
- Overload protection
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool

Specifications

	BS 12C LI-151B	BS 12C LI-152B
Battery type	Li-ion	Li-ion
Battery pack capacity (Ah)	1.5	1.5
No. of batteries supplied	1	2
Charger supplied	30 min	30 min
Max. drilling wood/ steel (mm)	20/10	20/10
Max. torque (Nm)	18.5	18.5
No load speed (rpm)	0 - 575	0 - 575
Weight with battery pack (kg)	1.0	1.0
Supplied in	Tool bag	Tool bag
Article Number	4935433901	4935433902
EAN Code	4002395126347	4002395126354

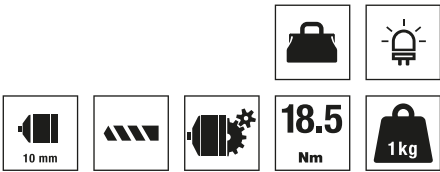

For further technical specifications, including noise and vibration data, please visit our website: [www.aeg-powertools.com](http://www.aeg-powertools.com)



12 V ULTRA COMPACT IMPACT DRIVER

PRO Li<sup>THIUM</sup> ION

BSS 12C

Features

- Ultra compact impact driver measuring only 163 mm
- 115 Nm torque
- Industrial metal gearbox and gears for superior durability
- Built in fuel gauge
- ¼" Hex bit reception
- Ergonomic soft-grip design
- NEW 3 beam LED for total workplace illumination
- Belt clip
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool

Specifications

	BSS 12C-0	BSS 12C LI-202C
Battery type	Li-ion	Li-ion
Battery pack capacity (Ah)	-	2.0
No. of batteries supplied	0	2
Charger supplied	-	30 min
Max. torque (Nm)	115	115
No load speed (rpm)	0 - 2000	0 - 2000
Impact rate (ipm)	0 - 3000	0 - 3000
Tool reception	¼" Hex	¼" Hex
Weight with battery pack (kg)	-	1.0
Supplied in	-	Kitbox
Article Number	4935446702	4935443965
EAN Code	4002395136407	4002395135639



12 V HAMMERDRILL/DRIVER

PRO Li<sup>THIUM</sup> ION


BSB 12G2

Features

- Compact & powerful for completion of all jobsite applications
- 30 Nm maximum torque delivers complete power
- 2 speeds 0-350 / 0-1350 rpm
- 24-stage torque adjustment
- FIXTEC 10 mm single sleeve chuck with full metal jaws
- 3 mode selector - ease of use between functions
- New 12V 1.5Ah pro Lithium pack delivering higher power and higher runtime
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool

Specifications

	BSB 12G2 LI-152C	BSB 12G2 NC-142C
Battery type	Li-ion	NiCd
Battery pack capacity (Ah)	1.5	1.4
No. of batteries supplied	2	2
Charger supplied	40 min	25 min
Max. drilling wood/ steel/ masonry (mm)	30/10/6	30/10/6
Max. percussion rate (bpm)	20.250	20.250
Chuck capacity (mm)	10	10
Max. torque (Nm)	30	30
No load speed (rpm)	0 - 350 / 0 - 1350	0 - 350 / 0 - 1350
Weight with battery pack (kg)	1.5	1.7
Supplied in	Kitbox	Kitbox
Article Number	4935446690	4935431986
EAN Code	4002395136360	4002395195053

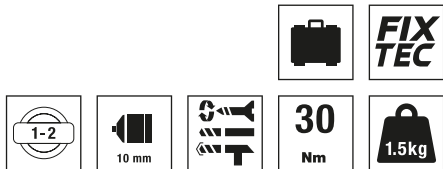

For further technical specifications, including noise and vibration data, please visit our website: [www.aeg-powertools.com](http://www.aeg-powertools.com)

12 V DRILL/DRIVER

PRO Li<sup>THIUM</sup> ION


BS 12G2

Features

- Compact & powerful for completion of all jobsite applications
- 30 Nm maximum torque delivers complete power
- 2 speeds 0-350 / 0-1350 rpm
- 24-stage torque adjustment for complete control
- FIXTEC 10 mm single sleeve chuck with full metal jaws
- New 12V 1.5 Ah pro lithium pack delivering higher power and higher runtime
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool

Specifications

	BS 12G2 LI-152C	BS 12G2 NC-142C
Battery type	Li-ion	NiCd
Battery pack capacity (Ah)	1.5	1.4
No. of batteries supplied	2	2
Charger supplied	40 min	25 min
Max. drilling wood/ steel (mm)	30/10	30/10
Chuck capacity (mm)	1.5 - 10	10
Max. torque (Nm)	30	30
No load speed (rpm)	0 - 350/0 - 1350	0 - 350/0 - 1350
Weight with battery pack (kg)	1.4	1.6
Supplied in	Kitbox	Kitbox
Article Number	4935446687	4935431985
EAN Code	4002395136353	4002395195060

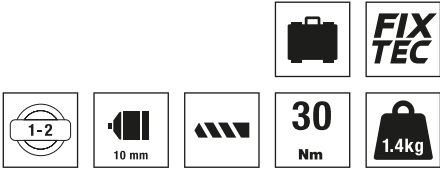

12 V CORDLESS HAMMER

PRO Li<sup>THIUM</sup> ION

BBH 12

Features

- L-shape SDS hammer for drilling and fixing into concrete up to 13 mm
- 0.9 Joule impact energy delivers high performance
- Hammer action stop for rotary drilling in wood and metal
- Built in fuel gauge
- Metal gearbox for extended durability
- Safety clutch for user protection
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool
- Supplied with a screwdriving bit adaptor

Specifications

	BBH12-0	BBH 12 LI-202C	BBH 12 LI-402C	BBH 12 LI-401C
Battery type	Li-ion	Li-ion	Li-ion	Li-ion
Battery pack capacity (Ah)	-	2.0	4.0	4.0
No. of batteries supplied	0	2	2	1
Charger supplied	-	50 min	100 min	100 min
Max. drilling wood/ steel/ concrete (mm)	10/8/13	10/8/13	10/8/13	10/8/13
Blow energy (EPTA)J	0.9	0.9	0.9	0.9
No load speed (rpm)	0 - 800	0 - 800	0 - 800	0 - 800
Full load hammer action (bpm)	0 - 5350	0 - 5350	0 - 5350	0 - 5350
Weight with battery pack (kg)	-	1.6	1.8	1.8
Supplied in	-	Kitbox	Kitbox	Kitbox
Article Number	4935446699	4935443968	4935443991	4935443988
EAN Code	4002395136391	4002395135646	4002395135721	4002395135714



For further technical specifications, including noise and vibration data, please visit our website: [www.aeg-powertools.com](http://www.aeg-powertools.com)



FLASHLIGHTS / BATTERY LAMPS

PROLiTHIUM  
ION

BLL 12 C

Features

- Fantastic power to weight ratio
- Extra long runtime with Pro lithium Packs



Specifications

	BLL 12C
Bulb type	LED
Battery Life (continuous use) (hrs)	9 (1.5ah)
Weight without battery pack (kg)	0.23
Article Number	4932352162
EAN Code	4002395368150



3.6 V INLINE SCREWDRIVER

PROLiTHIUM  
ION

SE 3.6

Features

- In-line or angled handle adjustment
- 10-stage torque selection plus drill stage
- Ergonomic, modern design
- 2-speed full metal gearbox
- 1/4" Hex bit reception



Specifications

	SE 3.6 LI-152C
Battery type	Li-ion
Battery pack capacity (Ah)	1.5
No. of batteries supplied	2
Charger supplied	30 min
Max. drilling aluminium/wood (mm)	5/6
Max. torque (Nm)	6.5
No load speed (rpm)	200/600
Weight with battery pack (kg)	0.6
Supplied in	Kitbox
Article Number	4935413165
EAN Code	4002395197538



For further technical specifications, including noise and vibration data, please visit our website: [www.aeg-powertools.com](http://www.aeg-powertools.com)

LASER DISTANCE METER

LMG 50

Features

- Point and shoot system - one person measuring with only one simple press of a button
- Area, volume, height and width measurement
- Pythagoras 3 types
- Large and easy to read 3 line LCD graphical display with automatic white backlight
- Measuring pin for corner measurement
- Memory recall for last 10 measurements
- IP54 water & dust protection
- Extremely slim LDM
- Rubber overmold for a perfect handling
- Large rising buttons with intuitive positioning
- Belt clip makes it easy to carry and to hold in the pocket
- Addition/Subtraction function for adding measures of areas and volumes
- 3 points of measures: from the back, front or back end pin
- Indirect surface measurement

Specifications

	LMG 50
Battery type	2 x AAA
Dimensions (mm)	109 x 40 x 32
IP protection class	IP 54
Max. measurement range (m)	50
Pythagoras function	3 - point
Temperature range (°C)	-10°C to + 50°C
Weight with battery pack (kg)	0.1
Article Number	4935447680
EAN Code	4002395294275



3 types of indirect distance measurements



Timer function



Unique on the market - 2 type of indirect surface calculation



Pin for accurate measurement in corners



Continuous measurement with min/max



Belt clip

For further technical specifications, including noise and vibration data, please visit our website: [www.aeg-powertools.com](http://www.aeg-powertools.com)



**AEG Powertools Lithium-Ion technology provides the optimum power platform for today's professional user by protecting both battery and machine in 3 ways:**

- 1) Electronic current protection**
  - shuts down if excessive current draw may harm battery and machine
  - thermal shutdown protects battery if temperature gets too high
  - protects individual cells from over discharging
- 2) Robust construction**
  - AEG Powertools Lithium-Ion technology benefits from robust internal and external design features as illustrated above, to ensure optimum durability
- 3) Individual cell monitoring**
  - individual cells charge and discharge at different rates
  - AEG Powertools Lithium-Ion technology offers tailored charging and discharging for individual cells for maximum cell life

## TRIPLE PROTECTION

### THERMAL MONITORING



**THERMAL OVERLOAD PROTECTION**  
Protects over heating

### OVER CURRENT MONITORING



**CURRENT OVERLOAD PROTECTION**  
Protects over loading

### INDIVIDUAL CELL MONITORING



**INDIVIDUAL CELL MONITORING**  
Protects over/under charging

## BATTERIES

### 18 V



	L1840R	L1830R	L1820R	L1815R	B1814G
Battery type	Li-ion	Li-ion	Li-ion	Li-ion	NiCd
Battery pack capacity (Ah)	4.0	3.0	2.0	1.5	1.4
Charger compatibility	AL 1218G, AL 9618	AL 9618, BL 1218	AL 9618, BL 1218	AL 9618, BL 1218	AL 9618, BL 1218
Article Number	4932430170	4932352655	4932430169	4932352654	4932352533
EAN Code	4002395378319	4002395373130	4002395378302	4002395373123	4002395371914

### 14.4 V



	L1430R GEN II	L1420R	L1415R	B1414G
Battery type	Li-ion	Li-ion	Li-ion	NiCd
Battery pack capacity (Ah)	3.0	2.0	1.5	1.4
Charger compatibility	AL 9618, BL 1218, AL 1218G	AL 9618, BL 1218, AL 1218G	AL 9618, BL 1218, AL 1218G	BL 1218, AL 9618, AL 1218G
Article Number	4932352657	4932430167	4932352656	4932352531
EAN Code	4002395373154	4002395378289	4002395373147	4002395371891

### 12 V



	L1240	L1230	L1220	L1215	L1215R	M1230R	B1214G
Battery type	Li-ion	Li-ion	Li-ion	Li-ion	Li-ion	NiMH	NiCd
Battery pack capacity (Ah)	4.0	3.0	2.0	1.5	1.5	3.0	1.4
Charger compatibility	LL 1230	LL 1230	LL 1230	LL 1230	AL 9618, BL 1218	AL 9618, BL 1218	AL 9618, BL 1218
Article Number	4932430166	4932352824	4932430165	4932352658	4932430365	4932352107	4932352532
EAN Code	4002395378272	4002395374823	4002395378265	4002395373161	4002395380268	4002395367603	4002395371907

### 3.6 V



	SL 3.6
Battery type	Li-ion
Battery pack capacity (Ah)	1.5
Charger compatibility	LA 036
Article Number	4932352969
EAN Code	4002395376278

## CHARGERS

	Battery type	Charging range	Charging time	Article Number	EAN Code
AL1214G	Li-ion, NiCd, NiMH	12 - 14.4 V	60 min	4932352481	4002395371402
AL1218G	Li-ion, NiCd, NiMH	12 - 18 V	60 min	4932352528	4002395371860
BL 1218 GEN II	Li-ion, NiCd, NiMH	12 - 18 V	30 min	4932352659	4002395373178
LL1230	Li-ion	12 V	30 min	4932352096	4002395367498
LA 036	Li-ion, NiCd, NiMH	3.6 V	30 min	4932352097	4002395367504



# HAMMER RANGE

**HIGH PERFORMANCE  
POWER WHEN YOU  
NEED IT MOST**

**AEG POWERTOOLS** offer an extensive selection of high performance rotary, combination, chipping and demolition hammers.

**AEG**  
POWERTOOLS





SDS-PLUS ROTARY HAMMER

BH 22E

Features

- Powerful 650 watt motor
- 22 mm drilling capacity in concrete
- Safety clutch for user protection
- Variable speed electronics for control
- Hammer action stop for drilling in wood or metal
- Forward and reverse mechanism
- Supplied with a side handle, metal depth gauge and a 4 m cable

Specifications

	BH 22E
Power input (W)	650
No load speed (rpm)	0 - 1290
Blow energy (EPTA)(J)	1.9
Full load hammer action (bpm)	0 - 3700
Max. drilling wood/ steel/ concrete (mm)	30/13/22
Weight (kg)	2.5
Supplied in	Kitbox
Article Number	4935411480
EAN Code	4002395197026



SDS-PLUS ROTARY HAMMER

BH 24E

Features

- Powerful 720 watt motor
- 24 mm drilling capacity in concrete
- Safety clutch for user protection
- Variable speed electronics for control
- Hammer action stop for drilling in wood or metal
- Forward and reverse mechanism
- Soft-grip handle for comfort
- Supplied with a side handle, metal depth gauge and a 4 m cable

Specifications

	BH 24E
Power input (W)	720
No load speed (rpm)	0 - 1500
Blow energy (EPTA)(J)	2.3
Full load hammer action (bpm)	0 - 4500
Max. drilling wood/ steel/ concrete (mm)	30/13/24
Weight (kg)	2.4
Supplied in	Kitbox
Article Number	4935428200
EAN Code	4002395194384



For further technical specifications, including noise and vibration data, please visit our website: [www.aeg-powertools.com](http://www.aeg-powertools.com)

SDS-PLUS COMBI HAMMER

KH 24XE

Features

- Powerful 720 watt motor
- 24 mm drilling capacity in concrete
- Rotary stop for light chiselling applications
- FIXTEC quick change chuck
- Safety clutch for user protection
- Variable speed electronics for control
- Hammer action stop for drilling in wood or metal
- Forward and reverse mechanism
- Soft-grip handle for comfort
- Supplied with a side handle, FIXTEC adaptor and keyless chuck, metal depth gauge and a 4 m cable

Specifications

	KH 24XE	KH 24E
Power input (W)	720	720
No load speed (rpm)	0 - 1500	0 - 1500
Blow energy (EPTA)(J)	2.3	2.3
Full load hammer action (bpm)	0 - 4500	0 - 4500
Max. drilling wood/ steel/ concrete (mm)	30/13/24	30/13/24
FIXTEC	Yes	No
Weight (kg)	2.6	2.4
Supplied in	Kitbox	Kitbox
Article Number	4935428220	4935428210
EAN Code	4002395194407	4002395194391



SDS-PLUS COMBI HAMMER

KH 26E

Features

- Powerful 800 watt motor
- 26 mm drilling capacity in concrete
- Rotary stop for light chiselling applications
- Safety clutch for user protection
- Variable speed electronics for control
- Hammer action stop for drilling in wood or metal
- Forward and Reverse mechanism
- Soft-grip handle for comfort
- Supplied with a side handle, meta depth gauge and a 4 m cable

Specifications

	KH 26E	KH 26XE
Power input (W)	800	800
No load speed (rpm)	0 - 1500	0 - 1500
Blow energy (EPTA)(J)	2.5	2.5
Full load hammer action (bpm)	0 - 4500	0 - 4500
Max. drilling wood/ steel/ concrete (mm)	30/13/26	30/13/26
FIXTEC	No	Yes
Weight (kg)	2.6	2.8
Supplied in	Kitbox	Kitbox
Article Number	4935428180	4935428910
EAN Code	4002395194360	4002395194681



For further technical specifications, including noise and vibration data, please visit our website: [www.aeg-powertools.com](http://www.aeg-powertools.com)





SDS-PLUS COMBI HAMMER

Features

- Powerful 1010 watt motor
- 28 mm drilling capacity in concrete
- Rotary stop for light chiselling applications
- Soft hammer mode reduces blow energy and speed for drilling/chiselling in sensitive materials
- FIXTEC quick change tool system
- Safety clutch for user protection
- Variable speed electronics for control
- Hammer action stop for drilling in wood or metal
- Soft-grip handle for comfort
- Electronic overload protection
- No load speed limitation
- Supplied with a side handle, FIXTEC adaptor and keyless chuck, metal depth gauge and a 4 m cable

Specifications

	KH 28 Super XE
Power input (W)	1010
No load speed (rpm)	0 - 1500
Blow energy (EPTA)(J)	2.8
Full load hammer action (bpm)	0 - 5000
Max. drilling wood/ steel/ concrete (mm)	30/13/28
Weight (kg)	2.8
Supplied in	Kitbox
Article Number	4935428190
EAN Code	4002395194377

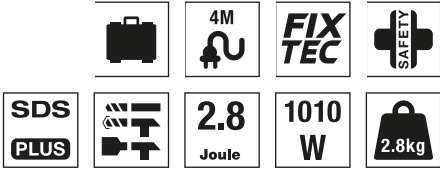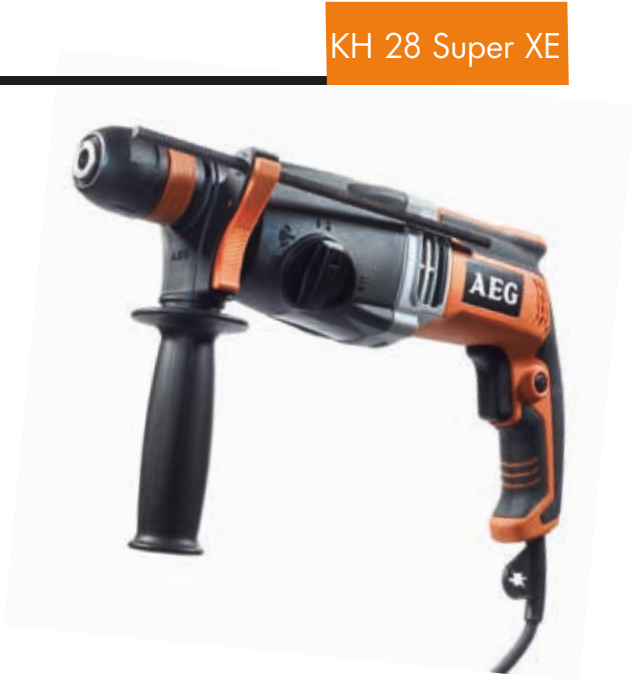


SDS-PLUS COMBI HAMMER

Features

- Powerful 750 watt motor
- 26 mm drilling capacity in concrete
- Rotary stop for light chiselling applications
- Soft hammer mode reduces blow energy and speed for drilling/chiselling in sensitive materials
- FIXTEC quick change tool system
- AVS anti-vibration system significantly reduces vibration for user comfort and safety
- Safety clutch for user protection
- Hammer action stop for drilling in wood or metal
- Supplied with a side handle, FIXTEC adaptor and keyless chuck, metal depth gauge and a 4 m cable

Specifications

	BH 26LXE	BH 26LE
Power input (W)	750	750
No load speed (rpm)	0 - 1400	0 - 1400
Blow energy (EPTA)(J)	2.7	2.7
Full load hammer action (bpm)	0 - 4500	0 - 4500
Max. drilling wood/ steel/ concrete (mm)	30/13/26	30/13/26
FIXTEC	Yes	No
Weight (kg)	3.1	2.9
Supplied in	Kitbox	Kitbox
Article Number	4935412000	4935412042
EAN Code	4002395197187	4002395197903

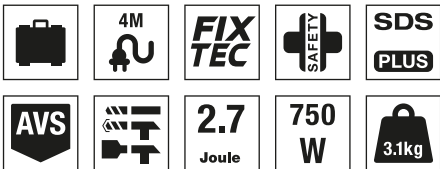


SDS-PLUS COMBI HAMMER

Features

- Powerful 750 watt motor
- 30 mm drilling capacity in concrete
- Rotary stop for light chiselling applications
- Soft hammer mode reduces blow energy and speed for controlled drilling in masonry
- FIXTEC quick change tool system
- AVS anti-vibration system significantly reduces vibration for user comfort and safety
- Safety clutch for user protection
- Hammer action stop for drilling in wood or metal
- Supplied with a side handle, FIXTEC adaptor and keyed chuck, metal depth gauge and a 4 m cable

Specifications

	PN 3500X	PN 3500
Power input (W)	750	750
No load speed (rpm)	0 - 970	0 - 970
Blow energy (EPTA)(J)	3.4	3.4
Full load hammer action (bpm)	0 - 4200	0 - 4200
Max. drilling wood/ steel/ concrete (mm)	40/16/30	40/16/30
FIXTEC	Yes	No
Weight (kg)	3.6	3.4
Supplied in	Kitbox	Kitbox
Article Number	4935412210	4935412152
EAN Code	4002395198337	4002395198306

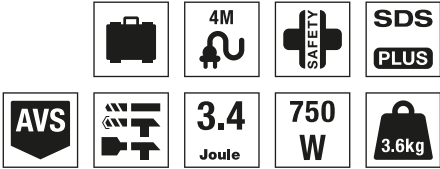


SDS-PLUS CHIPPING HAMMER

Features

- Powerful 720 watt motor
- 3.6 J impact energy for powerful chipping
- Variolock (35 positions) for selecting the most appropriate chisel angle
- Service hatches for easy changing of carbon brushes
- Lock-on switch function
- AVS anti-vibration system significantly reduces vibration for more comfortable operation
- Soft-grip for more comfortable handling
- Supplied with a side handle and a 4 m cable

Specifications

	PM 3
Power input (W)	720
Blow energy (EPTA)(J)	3.6
Full load hammer action (bpm)	0 - 3650
Weight (kg)	3.7
Supplied in	Kitbox
Article Number	4935412541
EAN Code	4002395199044

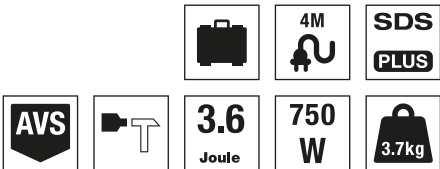

SDS-MAX COMBI HAMMER

KH 5 G


Features

- Powerful 1100 watt motor
- 7.5 J EPTA blow energy
- 40 mm drilling capacity in concrete
- Rotary stop for chiselling applications
- Safety clutch for user protection
- Soft start for precise start of drilling/chiselling
- Supplied with a side handle, metal depth gauge, grease and a 4 m cable



Specifications

	KH 5 G
Power input (W)	1100
No load speed (rpm)	0 - 450
Blow energy (EPTA)(J)	7.5
Full load hammer action (bpm)	0 - 3000
Max. drilling concrete/core bit/tunnel drill bit (mm)	40/105/65
Weight (kg)	6.4
Supplied in	Kitbox
Article Number	4935418160
EAN Code	4002395133062

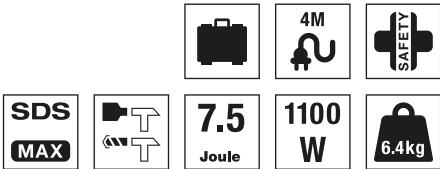

SDS-MAX TRADESMANN CHIPPING HAMMER

MH 5 G


Features

- Best power to weight ratio in its class
- 2 mode SDS-Max chipping hammer
- Multi position chisel function gives 12 different positions to optimize working angle
- Robust magnesium gear housing for tough environments, exact seat fitting of gear components for better cooling
- Low vibration construction enhances usage time per day
- Soft grip side handle
- Supplied with a side handle and a 4 m cable



Specifications

	MH 5G
Power input (W)	1100
Blow energy (EPTA)(J)	7.5
Full load hammer action (bpm)	0 - 3000
Vibration chiseling (m/s² )	16.7
Weight (kg)	5.9
Supplied in	Kitbox
Article Number	4935443170
EAN Code	4002395135462

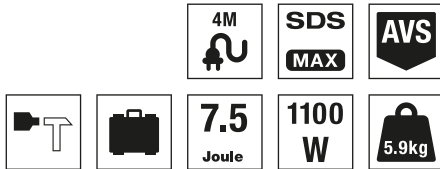

SDS-MAX COMBI HAMMER

KH 5 E


Features

- Powerful 1200 watt motor
- 40 mm drilling capacity in concrete
- Rotary stop for light chiselling applications
- Soft hammer mode reduces blow energy and speed for drilling/chiselling in sensitive materials
- AVS anti-vibration system significantly reduces vibration for user comfort and safety
- Safety clutch for user protection
- Soft start for precise start of drilling/chiselling
- Service light provides in-time notice in the case of worn out brushes
- Power light indicates if electricity flows
- Supplied with a side handle, metal depth gauge, grease and a 6 m cable



Specifications

	KH 5 E
Power input (W)	1200
No load speed (rpm)	0 - 300
Blow energy (EPTA)(J)	8.5
Full load hammer action (bpm)	0 - 2840
Max. drilling concrete/core bit/tunnel drill bit (mm)	40/90/65
Weight (kg)	6.6
Supplied in	Kitbox
Article Number	4935412326
EAN Code	4002395198603

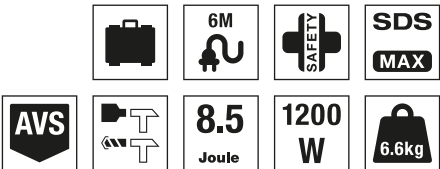

SDS-MAX DEMOLITION HAMMER

MH 5 E


Features

- Powerful 1200 watt motor
- 8.5 J impact energy for effortless chipping
- Soft hammer mode reduces blow energy for chiselling in sensitive materials
- AVS anti-vibration system significantly reduces vibration for user comfort and safety
- Soft start for precise start of chiselling
- Service light provides in-time notice in the case of worn out brushes
- Power light indicates if electricity flows
- Supplied with a D front handle, grease and a 6 m cable



Specifications

	MH 5 E
Power input (W)	1200
Blow energy (EPTA)(J)	8.5
Full load hammer action (bpm)	0 - 2840
Weight (kg)	6.2
Supplied in	Kitbox
Article Number	4935412361
EAN Code	4002395198795

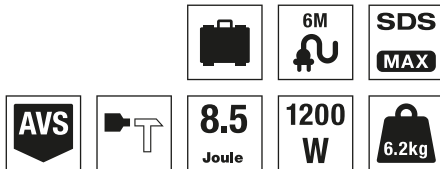



SDS-MAX LARGE COMBI HAMMER

PN 11 E


Features

- Powerful 1700 watt motor
- 20 J impact energy for heavy demolition applications
- 50 mm drilling capacity into concrete
- Variable speed electronics for control
- No load speed limitation
- AVS anti-vibration system significantly reduces vibration for user comfort and safety
- Safety clutch for user protection
- Soft start for precise start of drilling/chiselling
- Service light provides in-time notice in the case of worn out brushes
- Automatic cut out carbon brushes
- Soft-grip on handles for comfort
- Supplied with a D front handle, additional side handle, grease and a 6 m cable



Specifications

	PN 11 E
Power input (W)	1700
Blow energy (EPTA)(J)	20
Full load hammer action (bpm)	975 - 1950
Max. drilling concrete/core bit/tunnel drill bit (mm)	50/150/80
Weight (kg)	11.8
Supplied in	Kitbox
Article Number	4935412440
EAN Code	4002395198931

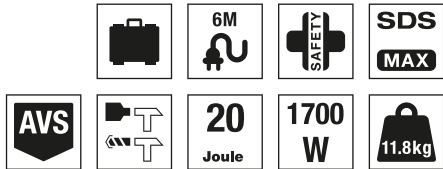

SDS-MAX LARGE DEMOLITION HAMMER

PM 10 E

Features

- Powerful 1600 watt motor
- 20 J impact energy for heavy demolition applications
- Variable speed electronics for control
- No load speed limitation
- AVS anti-vibration system significantly reduces vibration for user comfort and safety
- Soft start for precise start of chiselling
- Service light provides in-time notice in the case of worn out brushes
- Automatic cut out carbon brushes
- Soft-grip on handles for comfort
- Supplied with a D front handle, grease and a 6 m cable



Specifications

	PM 10 E
Power input (W)	1600
Blow energy (EPTA)(J)	20
Full load hammer action (bpm)	975 - 1950
Weight (kg)	11.0
Supplied in	Kitbox
Article Number	4935412418
EAN Code	4002395198832



For further technical specifications, including noise and vibration data, please visit our website: [www.aeg-powertools.com](http://www.aeg-powertools.com)

ROTARY/COMBINATION HAMMERS

		Power input (W)	Blow energy (EPTA)(J)	Full load hammer action (bpm)	Vibration drilling (m/s² )	Vibration chiseling (m/s² )	Weight (kg)
BBH 12		12	0.9	0 - 5350	4.4	n/a	1.8
BBH 18		18	2.3	0 - 4200	16.0	8.8	3.5
BH 22E		650	1.9	0 - 3700	15.5	n/a	2.5
BH 24E		720	2.3	0 - 4500	14.0	n/a	2.4
KH 24XE		720	2.3	0 - 4500	14.0	11.6	2.6
KH 26E		800	2.5	0 - 4500	15.0	12.4	2.6
BH 26LXE		750	2.7	0 - 4500	14.5	13	3.1
KH 28 Super XE		1010	2.8	0 - 5000	15.4	13.5	2.8
PN 3500X		750	3.4	0 - 4200	20.0	15	3.6
KH 5 G		1100	7.5	0 - 3000	16.8	16.7	6.4
KH 5 E		1200	8.5	0 - 2840	13.0	9	6.6
PN 11 E		1700	20	975 - 1950	12.5	11	11.8

DEMOLITION HAMMERS

		Power input (W)	Blow energy (EPTA)(J)	Full load hammer action (bpm)	Vibration drilling (m/s² )	Vibration chiseling (m/s² )	Weight (kg)
PM 3		720	3.6	0 - 3650	n/a	10	3.7
MH 5G		1100	7.5	0 - 3000	n/a	16.7	5.9
MH 5 E		1200	8.5	0 - 2840	n/a	11.5	6.2
PM 10 E		1600	20	975 - 1950	n/a	11	11.0



# DRILLING RANGE

**MORE POWER JUST WHEN YOU NEED IT**

**AEG POWERTOOLS** offer the power to drill deeper with their powerful range of percussion drills offering enhanced performance, reliability and durability for today's professional user.

**AEG**  
POWERTOOLS





NEW ROTARY DRILL

BE 750 RE

Features

- Compact and powerful 750 watt motor
- Speed dial and lock on trigger button for stationary drilling
- High drilling speed at 3.000 rpm
- IMB design for more durability
- Reinforced 2 sleeve 13 mm chuck
- Rubber overmold with micro texture for a perfect handling



Specifications

	BE 750 RE
Power input (W)	750
No load speed (rpm)	0 - 3000
Max. drilling wood/ steel (mm)	30/13
Chuck capacity (mm)	1.5 - 13
Max. torque (Nm)	27
Weight (kg)	1.9
Supplied in	Tool bag
Article Number	4935449160
EAN Code	4002395245116



ROTARY DRILL

B4-1050

Features

- Four-speed rotary drill for drilling up to 32 mm
- Breast plate and 57 mm gear neck for use in magnetic drill stands
- Standard morse taper 3 reception
- Attachable handle with adjustable length
- Supplied with a breast plate, attachable handle and a 4 m cable



Specifications

	B4-1050
Power input (W)	1050
No load speed (rpm)	220/260/350/420
Max. drilling wood/ steel/ aluminium (mm)	52/32/52
Max. torque (Nm)	200
Tool reception	Morse taper 3
Weight (kg)	9.7
Supplied in	-
Article Number	4935415000
EAN Code	4002395193356



For further technical specifications, including noise and vibration data, please visit our website: [www.aeg-powertools.com](http://www.aeg-powertools.com)

1-SPEED PERCUSSION DRILL

SBE 705 RE

Features

- Powerful 705 watt motor
- Speeded dial on the switch with lock on button
- Fast drilling speed at 2.800 rpm
- IMB design for more durability
- High quality 13mm metal chuck
- Rubber overmold with micro texture for a perfect handling



Specifications

	SBE 705 RE
Power input (W)	705
No load speed (rpm)	0 - 2800
Max. drilling wood/ steel/ masonry/ concrete (mm)	30/13/20/15
Max. torque (Nm)	25
Chuck capacity (mm)	13
Weight (kg)	1.9
Supplied in	Tool bag
Article Number	4935442830
EAN Code	4002395247851



1-SPEED PERCUSSION DRILL

SBE 750 RE

Features

- Compact and powerful 750 watt motor
- Speed dial and lock on trigger button for stationary drilling
- High drilling speed at 3.000 rpm
- IMB design for more durability
- Reinforced 2 sleeve 13 mm chuck
- Rubber overmold with micro texture for a perfect handling



Specifications

	SBE 750 RE	SBE 750 RZ
Power input (W)	750	750
Max. drilling concrete (mm)	16	16
Max. drilling masonry (mm)	20	20
Max. torque (Nm)	27	27
Chuck capacity (mm)	1.5 - 13	1.5 - 13
Chuck type	Keyless	Keyed
Weight (kg)	1.9	1.9
Supplied in	Kitbox	Tool bag
Article Number	4935442850	4935442840
EAN Code	4002395247875	4002395247868



For further technical specifications, including noise and vibration data, please visit our website: [www.aeg-powertools.com](http://www.aeg-powertools.com)

HIGH TORQUE PERCUSSION DRILL


SB2E 750 RX ST

Features

- Compact and powerful 750 watt high torque percussion drill
- 62 Nm torque delivers complete power
- IMB - Integrated-Metal-Block technology for highest durability and stability
- 2-speed gearbox with synchromesh gear lever
- Variable speed control with speed dial, forward and reverse mechanism
- Easy access to carbon brushes via removal of soft-grip rubber
- Hammer action stop for rotary drilling
- 13 mm metal keyless chuck
- Supplied with a side handle, metal depth gauge and a 4 m cable

Specifications

	SB2E 750 RX ST	SB2E 750 R ST
Power input (W)	750	750
No load speed (rpm)	0 - 1200/0 - 3400	0 - 1200/0 - 3400
Max. drilling wood/ steel/ masonry/ concrete (mm)	40/13/22/20	40/13/22/20
Max. torque (Nm)	62	62
Chuck capacity (mm)	13	13
Weight (kg)	2.5	2.5
Supplied in	Kitbox	Kitbox
Article Number	4935412853	4935412839
EAN Code	4002395192779	4002395192700

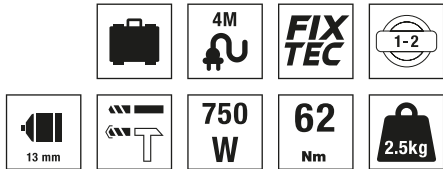

L-SHAPE PERCUSSION DRILL

Ergomax

Features

- Ultra compact powerful 750 watt percussion drill
- Superior ergonomic design
- Removable main handle
- IMB - Integrated-Metal-Block technology for highest durability and stability
- Variable speed control with forward and reverse mechanism
- Patented FIXTEC system for quick and easy changing of accessories
- 2-speed planetary synchromesh gearbox
- Direct bit reception for reduced weight, reduced length and improved visibility
- Hammer action stop for rotary drilling
- 13 mm metal keyless chuck
- Supplied with a side handle, metal depth gauge and a 4 m cable

Specifications

	Ergomax
Power input (W)	750
No load speed (rpm)	0 - 1200/0 - 3400
Max. drilling wood/ steel/ masonry/ concrete (mm)	40/13/22/20
Max. torque (Nm)	58
Chuck capacity (mm)	13
Weight (kg)	2.6
Supplied in	Kitbox
Article Number	4935412396
EAN Code	4002395198870



For further technical specifications, including noise and vibration data, please visit our website: [www.aeg-powertools.com](http://www.aeg-powertools.com)

2-SPEED PERCUSSION DRILL

SB2E 850 R

Features

- 850 Watt powerful 2 speed percussion drill
- 10 mm shorter than the previous version (235 mm OAL)
- Large switch with speed dial for stationary drilling or light mixing
- Large metal gear case for maximum durability
- 13 mm metal chuck
- Ergonomic soft-grip design for comfort

Specifications

	SB2E 850 R	SB2E 850 RZ
Power input (W)	850	850
No load speed (rpm)	0 - 1000/0 - 3000	0 - 1000/0 - 3000
Max. drilling wood/ steel/ masonry/ concrete (mm)	40/13/22/20	40/13/22/20
Max. torque (Nm)	56	56
Chuck capacity (mm)	13	13
Chuck type	Keyless	Keyed
Weight (kg)	2.7	2.7
Supplied in	Kitbox	Kitbox
Article Number	4935447360	4935447370
EAN Code	4002395294152	4002395294169



2-SPEED PERCUSSION DRILL

SB2E 1100 RV

Features

- 1100 Watt powerful 2 speed percussion drill
- Anti vibration system for better comfort of use
- Large metal gear case for maximum durability
- 13 mm metal chuck
- Ergonomic soft-grip design for comfort

Specifications

	SB2E 1100 RV	SB2E 1100 RVZ
Power input (W)	1100	1100
No load speed (rpm)	0 - 1000/0 - 3200	0 - 1000/0 - 3200
Max. drilling wood/ steel/ masonry/ concrete (mm)	40/13/24/22	40/13/24/22
Max. torque (Nm)	60	60
Chuck capacity (mm)	13	13
Chuck type	Keyless	Keyed
Weight (kg)	2.9	2.9
Supplied in	Kitbox	Kitbox
Article Number	4935447375	4935447385
EAN Code	4002395294176	4002395294183



For further technical specifications, including noise and vibration data, please visit our website: [www.aeg-powertools.com](http://www.aeg-powertools.com)



DRY DIAMOND DRILL


DB 1500-2 XE

Features

- Powerful 1500 watt motor
- High performance 2-speed dry diamond drill
- Dual protection with interlinked mechanical and electronic clutches for safety
- Robust construction and full metal gearbox for durability
- 2-speed gear box
- Electronics with soft start for precision drilling and motor overload protection
- Soft hammer mode
- Supplied with a handle

Specifications

	DB 1500-2XE
Power input (W)	1500
No load speed (rpm)	0 - 1500/0 - 3000
Spindle size	M 18 x 2.5
Max. drilling masonry (mm)	162
Weight (kg)	4.2
Supplied in	Kitbox
Article Number	4935412475
EAN Code	4002395198955

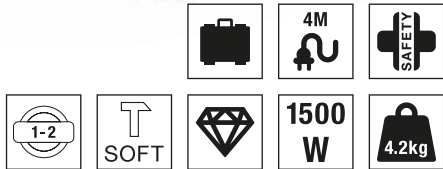

WALL CHASER

MFE 1500

Features

- Powerful 1500 watt motor
- Electronics with thermal overload protection and soft start
- Variable and adjustable cutting depth for accurate results
- Variable cutting width for versatility
- Bayonet adaptor for dust extraction
- Spindle lock
- Supplied with a 4 m cable, special break out chisel, front handle, suction adaptor and a spanner

Specifications

	MFE 1500
Power input (W)	1500
Disc diameter (mm)	125
No load speed (rpm)	0 - 9500
Cutting width (mm)	8-26
Weight (kg)	4.1
Supplied in	Kitbox
Article Number	4935413605
EAN Code	4002395192809



DRYWALL SCREWDRIVER


S 4000 E

Features

- Powerful 720 watt motor for increased productivity
- Compact high speed screwdriver for drywall applications
- Full metal gearbox for durability
- Easily adjustable depth-setting nosepiece for consistent fastener depth
- Forward and reverse mechanism
- Ergonomic design and soft-grip for comfortable handling
- ¼" Hex bit reception
- Belt clip
- Supplied with a depth gauge, bit holder, PH 2 bit, belt clip and a 4 m cable

Specifications

	S 4000 E
Power input (W)	720
No load speed (rpm)	0 - 4000
Drywall screws (mm)	5
Max. torque (Nm)	10
Tool reception	¼" Hex
Weight (kg)	1.4
Supplied in	-
Article Number	4935413215
EAN Code	4002395197637

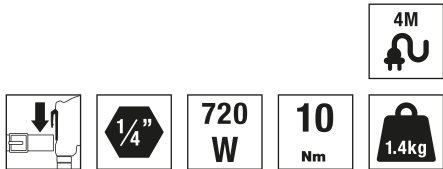

SELF DRILLING SCREWDRIVER

S 2500 E

Features

- Powerful 720 watt motor for increased productivity
- Compact self drilling screwdriver with high torque for self tapping screws
- Full metal gearbox for durability
- Easily adjustable depth-setting nosepiece for consistent fastener depth
- Forward and reverse mechanism
- Ergonomic design and soft grip for comfortable handling
- ¼" Hex bit reception
- Belt clip
- Supplied with a 2 depth gauge, bit holder, PH 2 bit, belt clip, 4 m cable and ⅜" & ⅝" Hex sockets

Specifications

	S 2500 E
Power input (W)	720
No load speed (rpm)	0 - 2500
Self-tapping (mm)	6
Wood screws to (mm)	6
Max. torque (Nm)	14
Tool reception	¼" Hex
Weight (kg)	1.5
Supplied in	-
Article Number	4935413225
EAN Code	4002395197651





# METAL- WORKING RANGE

## POWER TO PERFORM

**AEG POWERTOOLS** offer an extensive range of grinders in a wide variety of power classes for the most diverse professional applications. These high performance tools are equipped with advanced features to ensure comfort and ease of use in the most challenging environments

**AEG**  
POWERTOOLS





SMALL ANGLE GRINDER

WS 8-115 S

Features

- New powerful 800 watt motor
- Line lock out (LLO)-function to prevent automatic start up after power breakdown
- Metal gearbox for durability
- Directed air exhaust
- Gear head rotates at 90° intervals for added versatility
- Flat metal gear head for excellent visibility of work piece and optimised cutting depth
- Protected air inlets
- Spindle lock
- Supplied with an additional handle, flange, flange nut and spanner



Specifications

	WS8-115S
Power input (W)	800
No load speed (rpm)	12.000
Max. cutting depth (mm)	35
Disc diameter (mm)	115
Spindle size	M14
Weight (kg)	1,9
Supplied in	-
Article Number	4935451293
EAN Code	4002395150519



SMALL ANGLE GRINDER

WS 8-125 S

Features

- New powerful 800 watt motor
- Line lock out (LLO)-function to prevent automatic start up after power breakdown
- Metal gearbox for durability
- Directed air exhaust
- Gear head rotates at 90° intervals for added versatility
- Flat metal gear head for excellent visibility of work piece and optimised cutting depth
- Protected air inlets
- Spindle lock
- Supplied with an additional handle, flange, flange nut and spanner



Specifications

	WS8-125SK	WS8-125S
Power input (W)	800	800
No load speed (rpm)	12.000	12.000
Max. cutting depth (mm)	40	40
Disc diameter (mm)	125	125
Spindle size	M14	M14
Weight (kg)	1,9	1,9
Supplied in	Kitbox	-
Article Number	4935451298	4935451296
EAN Code	4002395150564	4002395150540



For further technical specifications, including noise and vibration data, please visit our website: [www.aeg-powertools.com](http://www.aeg-powertools.com)

SMALL ANGLE GRINDER

WS 10-115 S

Features

- New powerful 1000 watt motor with outstanding performance
- Line lock out (LLO)-function to prevent automatic start up after power breakdown
- Machined metal gears for best durability
- Flat metal gear head for excellent visibility of work piece and work in restricted areas
- Optimised cooling slots prevent overheating, even when blocking occasionally by hand
- Most compact girth and length for comfortable use all day long
- Lightweight for best handling
- AVS side handle for comfort and safety
- Burst resistant keyless safety guard for easy and fast guard adjustment
- Spindle lock
- Supplied with a AVS side handle, keyless safety guard, flange, flange nut and spanner



Specifications

	WS 10-115 S
Power input (W)	1000
No load speed (rpm)	11.500
Max. cutting depth (mm)	35
Disc diameter (mm)	115
Spindle size	M14
Weight (kg)	2,3
Supplied in	-
Article Number	4935451300
EAN Code	4002395150588



SMALL ANGLE GRINDER

WS 10-125 S

Features

- New powerful 1000 watt motor with outstanding performance
- Line lock out (LLO)-function to prevent automatic start up after power breakdown
- Machined metal gears for best durability
- Flat metal gear head for excellent visibility of work piece and work in restricted areas
- Optimised cooling slots prevent overheating, even when blocking occasionally by hand
- Most compact girth and length for comfortable use all day long
- Lightweight for best handling
- AVS side handle for comfort and safety
- Burst resistant keyless safety guard for easy and fast guard adjustment
- Spindle lock
- Supplied with a AVS side handle, keyless safety guard, flange, flange nut and spanner



Specifications

	WS 10-125 S	WS 10-125 SK
Power input (W)	1000	1000
No load speed (rpm)	11.500	11.500
Max. cutting depth (mm)	40	40
Disc diameter (mm)	125	125
Spindle size	M14	M14
Weight (kg)	2,3	2,3
Supplied in	-	Kitbox
Article Number	4935451302	4935451303
EAN Code	4002395151202	4002395151219



For further technical specifications, including noise and vibration data, please visit our website: [www.aeg-powertools.com](http://www.aeg-powertools.com)

SMALL ANGLE GRINDER

WS 12-125 S

Features

- New powerful 1200 watt motor with outstanding performance
- Line lock out (LLO)-function to prevent automatic start up after power breakdown
- Machined metal gears for best durability
- Flat metal gear head for excellent visibility of work piece and work in restricted areas
- Optimised cooling slots prevent overheating, even when blocking occasionally by hand
- Most compact girth and length for comfortable use all day long
- Lightweight for best handling
- AVS side handle for comfort and safety
- Burst resistant keyless safety guard for easy and fast guard adjustment
- Spindle lock
- Supplied with an AVS side handle, keyless safety guard, flange, flange nut and spanner



Specifications

	WS 12-125 SK	WS 12-125 S
Power input (W)	1200	1200
No load speed (rpm)	11.500	11.500
Max. cutting depth (mm)	40	40
Disc diameter (mm)	125	125
Spindle size	M14	M14
Weight (kg)	2,4	2,4
Supplied in	Kitbox	-
Article Number	4935451307	4935451306
EAN Code	4002395151257	4002395151240

11000  
RPM

| 125 mm |

1200  
W

2.4kg

SMALL ANGLE GRINDER

WS13-125 SXE

Features

- New powerful 1300 W motor with outstanding performance
- Line lock out (LLO)-function to prevent automatic start up after power breakdown
- Variable speed electronics for lower speed setting especially in finishing applications
- Constant speed for best performance and high torque, even in lower speed applications
- Machined metal gears for best durability
- Flat metal gear head for excellent visibility of work piece and work in restricted areas
- Optimised cooling slots prevent overheating, even when blocking occasionally by hand
- Most compact girth and length for comfortable use all day long
- Lightweight for best handling
- AVS side handle for comfort and safety
- Burst resistant keyless safety guard for easy and fast guard adjustment
- Spindle lock
- Supplied with an AVS side handle, keyless safety guard, flange, flange nut and spanner



Specifications

	WS13-125 SXE	WS13-125 SXEK
Power input (W)	1300	1300
No load speed (rpm)	2.800 - 11.500	2.800 - 11.500
Max. cutting depth (mm)	40	40
Disc diameter (mm)	125	125
Spindle size	M14	M14
Weight (kg)	2,4	2,4
Supplied in	-	Kitbox
Article Number	4935451309	4935451310
EAN Code	4002395151271	4002395151288

| 125 mm |

1300  
W

2.4kg



SMALL ANGLE GRINDER

WSE 14-125 MX


Features

- Powerful 1450 watt motor
- DIGITRONICr with variable speed preselection, soft start, motor overload protection and no load speed limitation
- FIXTEC - patented nut for fast and easy disc changing
- Automatic cut-off, easy change carbon brushes
- Flat metal gearhead for excellent visibility of work piece and optimised cutting depth
- Epoxy coating field and armature - combat abrasive dust to increase tool lifetime
- New “snap-in” safety guard for keyless adjustment
- Spindle lock, with safety mechanism
- Large surface safety switch
- Supplied with a 4 m cable, additional handle, FIXTEC nut, safety guard and a flange nut



Specifications

	WSE 14-125 MX/K	WSE 14-125 MX/K DMS
Power input (W)	1450	1450
No load speed (rpm)	2,600 - 11,000	2,600 - 11,000
Max. cutting depth (mm)	35	35
Disc diameter (mm)	125	125
Spindle size	M14	M14
Weight (kg)	2.5	2.5
Deadman switch	No	Yes
Supplied in	Kitbox	Kitbox
Article Number	4935412242	4935412261
EAN Code	4002395198375	4002395198436

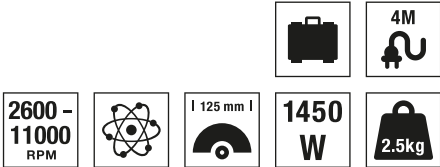

LARGE ANGLE GRINDER

WS 24-180 V

Features

- Powerful 2400 watt motor
- AVS: additional handle for more comfort handling and less strain on body joints
- Epoxy-coated field windings and armature - prevents accumulation of abrasive dust, increasing tool life
- High quality sealed bearings provide superior protection
- New “snap-in” safety guard for keyless adjustment
- Convenient three-finger switch with soft start
- Soft start for smooth startup
- Supplied with a 4 m cable, wrench, flange, flange nut, anti-vibration additional handle, safety guard



Specifications

	WS 24-180 V
Power input (W)	2400
No load speed (rpm)	0 - 8,500
Max. cutting depth (mm)	44
Disc diameter (mm)	180
Spindle size	M14
Weight (kg)	5.3
Supplied in	-
Article Number	4935446490
EAN Code	4002395136285



LARGE ANGLE GRINDER

WS 22-180

Features

- Powerful 2200 W motor with powder field coating for long life time and outstanding performance in all applications
- Extreme compact design with an overall short length of 485 mm and 5.1 kg for most comfortable handling
- Line lock out function to prevent automatic start up after power loss
- Soft start for smooth start up
- Burst resistant keyed safety guard
- External brush doors for easy access to the brushes for fast servicing
- Supplied with a cable, wrench, flange, flange nut, anti-vibration addition handle and a safety guard



Specifications

	WS 22-180 E	WS 22-180 DMS
Power input (W)	2200	2200
No load speed (rpm)	0 - 8,500	0 - 8,500
Max. cutting depth (mm)	45	45
Disc diameter (mm)	180	180
Spindle size	M14	M14
Deadman switch	No	Yes
Weight (kg)	5.1	5.1
Supplied in	-	-
Article Number	4935431690	4935431700
EAN Code	4002395194858	4002395194865



LARGE ANGLE GRINDER

WS 22-230

Features

- Powerful 2200 watt motor with powder field coating for long life time and outstanding performance in all applications
- Extreme compact design with an overall short length of 485 mm and 5.1 kg for most comfortable handling
- Line lock out function to prevent automatic startup after power loss
- Soft start for smooth start up
- Burst resistant keyed safety guard
- External brush doors for easy access to the brushes for fast servicing
- Supplied with a cable, wrench, flange, fange nut, anti-vibration additional handle and a safety guard



Specifications

	WS 22-230 E	WS 22-230 DMS
Power input (W)	2200	2200
No load speed (rpm)	0 - 6,600	0 - 6,600
Max. cutting depth (mm)	68	68
Disc diameter (mm)	230	230
Spindle size	M14	M14
Deadman switch	No	Yes
Weight (kg)	5.2	5.2
Supplied in	-	-
Article Number	4935431720	4935431730
EAN Code	4002395194889	4002395194902



LARGE ANGLE GRINDER

WS 24-230 V

Features

- Powerful 2400 watt motor
- AVS: additional handle for more comfort handling and less strain on body joints
- Epoxy-coated field windings and armature - prevents accumulation of abrasive dust, increasing tool life
- High quality sealed bearings provide superior protection
- New “snap-in” safety guard for keyless adjustment
- Convenient three-finger switch with soft start
- Soft start for smooth startup
- Supplied with a 4 m cable, wrench, flange, flange nut, anti-vibration handle and a safety guard



Specifications

	WS 24-230 V
Power input (W)	2400
No load speed (rpm)	0 - 6,600
Max. cutting depth (mm)	68
Disc diameter (mm)	230
Spindle size	M14
Weight (kg)	5.4
Supplied in	–
Article Number	4935446500
EAN Code	4002395136292



LARGE ANGLE GRINDER

WS 24-230  
GEV

Features

- Powerful 2400 watt motor with powder field coating for long life time and outstanding performance in all applications
- Extreme compact design with an overall short length of 515 mm and 5.6 kg for most comfortable handling
- Line lock out function to prevent automatic start up after power loss
- Soft start for smooth start up
- Burst resistant quick release safety guard for easy adjustment
- AVS equipped motor housing and 2-positions Anti-vibration side handle for less vibrations
- 7 step rotating main handle and large soft grip area for most comfortable handling
- External brush doors for easy access to the brushes for fast servicing
- 4 m rubber cable
- Supplied with a wrench, flange, flange nut, anti-vibration additional handle and a safety guard



Specifications

	WS 24-230 GEV	WS 24-230 GV DMS
Power input (W)	2400	2400
No load speed (rpm)	0 - 6,600	0 - 6,600
Max. cutting depth (mm)	68	68
Disc diameter (mm)	230	230
Spindle size	M14	M14
Deadman switch	No	Yes
Weight (kg)	5.6	5.6
Supplied in	Kitbox	–
Article Number	4935431765	4935431775
EAN Code	4002395194964	4002395194971



For further technical specifications, including noise and vibration data, please visit our website: [www.aeg-powertools.com](http://www.aeg-powertools.com)

FIXTEC NUTS



DIE GRINDER

GS 500 E

Features

- High speed, one handed die grinder
- Variable speed electronic
- Automatic cut-off carbon brushes
- High rotation precision metal gearbox
- Weight only 1.3 kg
- Ergonomic switch
- Supplied with a key, 6 mm collet and a 4 m cable



Specifications

	GS 500 E
Power input (W)	500
No load speed (rpm)	10,000 - 29,000
Collet capacity (mm)	6
Max. grinding wheel diameter (mm)	40
Max. grinding pin diameter (mm)	20
Weight (kg)	1.3
Supplied in	–
Article Number	4935412985
EAN Code	4002395192939



For further technical specifications, including noise and vibration data, please visit our website: [www.aeg-powertools.com](http://www.aeg-powertools.com)



DIE GRINDER

GSL 600 E

Features

- Variable speed electronics
- Long spindle for easy access to awkward places
- Double bearing spindle seating for smooth rotation
- Automatic cut-off carbon brushes
- High rotation precision metal gearbox
- Weight only 1.9 kg
- Ergonomic switch
- Supplied with a key, 6 mm collet and a 4 m cable



Specifications

	GSL 600 E
Power input (W)	600
No load speed (rpm)	10,000 - 29,000
Collet capacity (mm)	6
Max. grinding wheel diameter (mm)	40
Max. grinding pin diameter (mm)	20
Weight (kg)	1.9
Supplied in	-
Article Number	4935412965
EAN Code	4002395192946



RIGHT ANGLE SANDER

SE 12-180

Features

- 1200 watt sander with full wave electronics
- Variable speed electronics for various materials and finishing
- High motor torque and optimum speed range for sanding, especially for fine surface work
- Automatic cut-off carbon brushes
- Externally accessible brushes for easy replacement
- Spindle lock
- Large 3 finger switch
- Supplied with a 4 m cable, additional handle with guard, flange nut and a flexible backing pad



Specifications

	SE 12-180
Power input (W)	1200
No load speed (rpm)	1,800 - 4,800
Disc diameter (mm)	180
Spindle size	M14
Weight (kg)	2.5
Supplied in	-
Article Number	4935412279
EAN Code	4002395198481



POLISHER

PE 150


Features

- 1200 watt polisher
- Variable speed electronics for various materials and finishes
- Special gearing for high spindle torque and ideal polishing speed
- Automatic cut-off carbon brushes
- Externally accessible brushes for easy replacement
- Spindle lock
- Large 3 finger switch
- Supplied with a 4 m cable, additional handle, cap and a backing pad



Specifications

	PE 150
Power input (W)	1200
No load speed (rpm)	900 - 2,500
Disc diameter (mm)	150
Spindle size	M14
Weight (kg)	2.1
Supplied in	-
Article Number	4935412266
EAN Code	4002395198443



METAL CHOPSAW

SMT 355


Features

- Powerful 2300 watt motor
- - 45°/0°/45° mitre capacity with quick release mitre clamp
- Spindle lock for easy wheel and accessory changing
- Deflector protects the user from sparks
- Oversize guard for added safety
- On board wrench storage
- Rubber feet for greater stability
- Replaceable carbon brushes
- Supplied with a 4 m cable, 355 mm cutting disc and a spanner



Specifications

	SMT 355
Power input (W)	2300
No load speed (rpm)	0 - 3800
Wheel size (mm)	355
Bore size (mm)	25.4
Weight (kg)	16.5
Supplied in	-
Article Number	4935411770
EAN Code	4002395129638

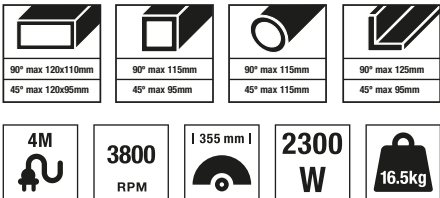



# WOOD- WORKING RANGE

## HIGH PERFORMANCE POWERFUL SOLUTIONS

**AEG POWERTOOLS** woodworking range offers a comprehensive selection of high performance machines to take on the most varied, professional applications. All of these tools offer ease of use, reliability, durability and features to ensure professional efficiency and best results.

**AEG**  
POWERTOOLS





66 MM CIRCULAR SAW

KS 66-2


Features

- Powerful 1600 watt motor
- 0-56 degree bevel capacity with 45 degree positive stop
- Die cast shoe and guard. More durable and stable
- Large action levers for easy operating
- Micro texture grip on front and back handle
- 4 m cable
- Dust port with DEK 26 connection to our AEG dust extractors



Specifications

	KS 66-2
Power input (W)	1600
No load speed (rpm)	0 - 5,800
Mitre capacity (°)	0- 56
Blade diameter/Arbor size (mm)	190/30
Max. cutting depth 45/90° (mm)	47/64
Weight (kg)	4.8
Supplied in	Tool bag
Article Number	4935446675
EAN Code	4002395136339

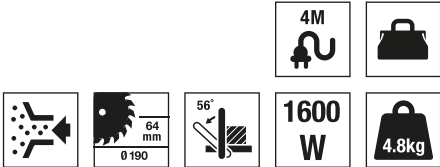

55 MM CIRCULAR SAW

KS 55-2


Features

- Powerful 1200 watt motor
- 0-50° bevel capacity with 45° positive stop
- Magnesium shoe and guards. More durable and stable
- Large action levers for easy operating
- Micro texture grip on front and back handle
- 4 m cable
- Dust port with DEK 26 connection to our AEG dust extractors



Specifications

	KS 55-2
Power input (W)	1200
No load speed (rpm)	0 - 6,100
Mitre capacity (°)	0 - 50
Blade diameter/Arbor size (mm)	165/20
Max. cutting depth 45/90° (mm)	41/54
Weight (kg)	3.3
Supplied in	Tool bag
Article Number	4935446665
EAN Code	4002395136322

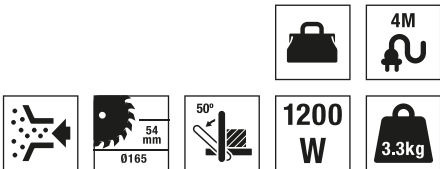

For further technical specifications, including noise and vibration data, please visit our website: [www.aeg-powertools.com](http://www.aeg-powertools.com)

TOPHANDLE JIGSAW

STEP 100 X


Features

- New Tophandle Jigsaw with a new powerful 700 watt motor
- Patented FIXTEC system for changing saw blades in seconds
- 6-different speed settings for a better cutting control
- Better ergonomic design with integrated soft-grip
- Dust extraction port
- Dust blower keeps cut line clear for accuracy
- Keyless Adjustment of the Base plate for cutting close to edges and for precise Bevel cuts up to 45°
- Supplied with a 4m cable, blade, anti-splitting guard and dust cap



Specifications

	STEP 100 X
Power input (W)	700
No load stroke rate (spm)	1000 - 3200
Mitre capacity (°)	45°
Stroke length (mm)	20
Pendulum settings	4
Max. cutting capacity wood/ steel/ aluminium (mm)	100/10/20
Weight (kg)	2.3
Supplied in	Kitbox
Article Number	4935451000
EAN Code	4002395136513

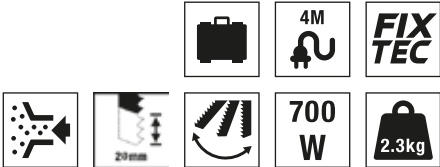

TOPHANDLE JIGSAW

STEP 100


Features

- New Tophandle Jigsaw with a new powerful 700 watt motor
- 6-different speed settings for a better cutting control
- Better ergonomic design with integrated soft-grip
- Dust extraction port
- Dust blower keeps cut line clear for accuracy
- Supplied with a 4m cable, blade, anti-splitting guard and dust cap



Specifications

	STEP 100
Power input (W)	700
No load stroke rate (spm)	1000 - 3200
Mitre capacity (°)	45°
Stroke length (mm)	20
Pendulum settings	4
Max. cutting capacity wood/ steel/ aluminium (mm)	100/10/20
Weight (kg)	2.2
Supplied in	-
Article Number	4935451001
EAN Code	4002395136520

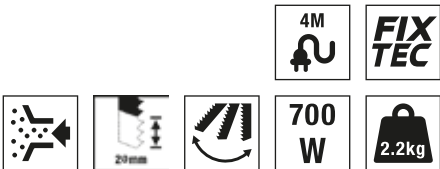

For further technical specifications, including noise and vibration data, please visit our website: [www.aeg-powertools.com](http://www.aeg-powertools.com)

TOPHANDLE JIGSAW


STEP 80

Features

- New Tophandle Jigsaw with a new powerful 700 watt motor
- 6-different speed settings for a better cutting control
- Better ergonomic design with integrated soft-grip
- Dust extraction port
- Dust blower keeps cut line clear for accuracy
- Supplied with a 4m cable, blade, anti-splitering guard and dust cap

Specifications

	STEP 80
Power input (W)	700
No load stroke rate (spm)	1000 - 3200
Mitre capacity (°)	45°
Stroke length (mm)	20
Pendulum settings	4
Max. cutting capacity wood/ steel/ aluminium (mm)	80/10/20
Weight (kg)	2.2
Article Number	4935451002
EAN Code	4002395136537

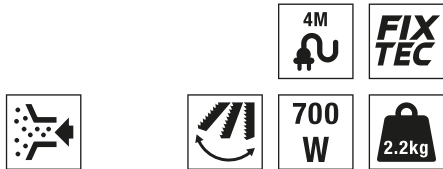

PALM JIGSAW


PST 500 X

Features

- Powerful 440 watt motor
- Patented FIXTEC system for changing saw blades in seconds
- LED light for cut line visibility
- Pendulum function
- Unique palm design for use in tight spaces and easy handling
- Dust blower keeps cut line clear for accuracy
- Supplied with a clear dust cap, splintering device, 1 saw blade and a 4 m cable

Specifications

	PST 500 X
Power input (W)	440
No load stroke rate (spm)	3700
Mitre capacity (°)	45°
Stroke length (mm)	15
Pendulum settings	1
Max. cutting capacity wood/ steel/ aluminium (mm)	40/6/10
Weight (kg)	2.3
Supplied in	Tool bag
Article Number	4935428260
EAN Code	4002395194315

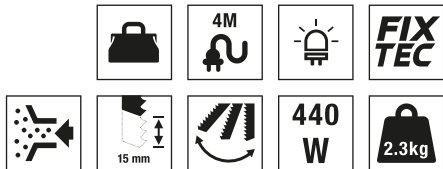

For further technical specifications, including noise and vibration data, please visit our website: [www.aeg-powertools.com](http://www.aeg-powertools.com)

BODYGRIP JIGSAW


ST 800 XE

Features

- Powerful 705 watt motor
- Patented FIXTEC system for changing saw blades in seconds
- 4 – stage pendulum adjustment
- Variable speed electronics for control
- Ergonomic slimline bodygrip design with integrated soft grip
- Dust extraction port
- Dust blower keeps cut line clear for accuracy
- Base plate can be moved backwards for cutting close to edges
- Supplied with a 4 m cable, blade, anti-splintering guard, sliding shoe and a dust cap

Specifications

	ST 800 XE
Power input (W)	705
No load stroke rate (spm)	600 - 2700
Mitre capacity (°)	45°
Stroke length (mm)	26
Pendulum settings	4
Max. cutting capacity wood/ steel/ aluminium (mm)	110/10/25
Weight (kg)	2.3
Supplied in	Kitbox
Article Number	4935412950
EAN Code	4002395192892

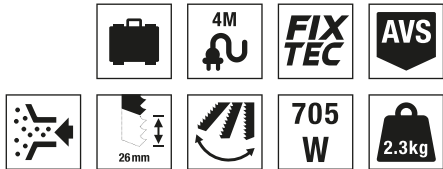

TOPHANDLE JIGSAW


STEP 1200 BX

Features

- Powerful 600 watt motor
- Patented FIXTEC system for changing saw blades in seconds
- 4 – stage pendulum adjustment
- Variable speed electronics for control
- Ergonomic top handle design with integrated soft-grip
- Sawdust blower keeps cutting line clear for accuracy
- Base plate can be moved backwards for sawing close to edges and for precise mitre cuts to 45°
- Supplied with a 4 m cable, blade, anti-splintering guard, sliding shoe, dust cap and a suction adaptor

Specifications

	STEP 1200 BX
Power input (W)	600
No load stroke rate (spm)	500 - 3000
Mitre capacity (°)	45°
Stroke length (mm)	26
Pendulum settings	4
Max. cutting capacity wood/ steel/ aluminium (mm)	110/10/30
Weight (kg)	2.4
Supplied in	Kitbox
Article Number	4935412819
EAN Code	4002395192694

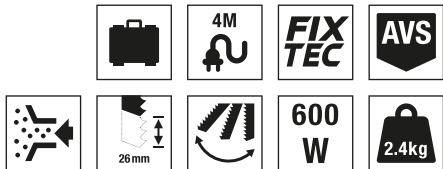

For further technical specifications, including noise and vibration data, please visit our website: [www.aeg-powertools.com](http://www.aeg-powertools.com)



BODYGRIP JIGSAW


STEP 1200 XE

Features

- Powerful 730 watt motor
- Patented FIXTEC system for changing saw blades in seconds
- 4 – stage pendulum adjustment
- Variable speed selection for correct speed to match the material and blade
- Soft start prevents sudden kick back of machine on start up
- Integrated electronics allows constant speed under load
- Ergonomic and very slim body grip design with integrated soft-grip zone
- Dust extraction port
- Sawdust blower keeps cutting line clear for accuracy
- Adjustable dust extraction (front or back) over switch
- Base plate can be moved backwards for cutting close to edges and for precise mitre cuts to 45°
- Supplied with a 4 m cable, 1 saw blade, anti-splintering guard, dust cap and a suction adaptor

Specifications

	STEP 1200 XE
Power input (W)	730
No load stroke rate (spm)	500 - 3000
Mitre capacity (°)	45°
Stroke length (mm)	26
Pendulum settings	4
Max. cutting capacity wood/ steel/ aluminium (mm)	135/10/30
Weight (kg)	2.4
Supplied in	Kiribox
Article Number	4935412878
EAN Code	4002395192762

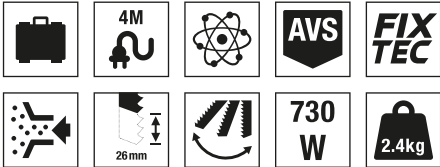

COMBO ROUTER


MF 1400 KE

Features

- 2 routers in one for maximum flexibility in all kinds of application
- Soft start to prevent sudden kickback
- Integrated electronics maintain constant speed under load
- Variable speed electronics for optimum control in a wide range of materials
- Large soft-grip handles for decreased vibration and greater comfort
- Flat motor housing with integrated rubber feet for convenient upside down bit change with spindle lock
- Premium collet and shaft design minimises run out
- Built in LED for unparalleled workplace illumination
- Through table depth adjustment for ultimate convenience
- Supplied with 5 guide bushes, 3 dust extraction adaptors, parallel guide, 2 collects (8/12 mm) 2 keys, oval base, round base and a chip shield

Specifications

	MF 1400 KE
Power input (W)	1400
Collet capacity (mm)	8 / 12
Plunge capacity (mm)	64
No load speed (rpm)	10.000 - 23.000
Weight (kg)	5.7
Supplied in	Tool bag
Article Number	4935411850
EAN Code	4002395193295

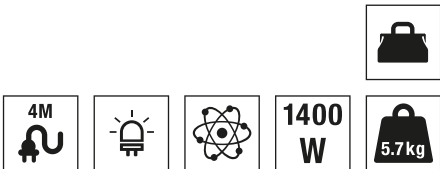

For further technical specifications, including noise and vibration data, please visit our website: [www.aeg-powertools.com](http://www.aeg-powertools.com)

ROUTER

OF 2050 E

Features

- Powerful 2050 watt motor
- Electronic variable speed control
- Plunge depth set by calibrated dial
- Micro depth adjustment
- 3-stage depth stop lock
- Vertical depth adjustment scales
- Supplied with a 4 m cable, 6/8/12 mm collet, spanner, parallel guide, 4 guide bushes, router bit and dust adaptor

Specifications

	OF 2050 E
Power input (W)	2050
Collet capacity (mm)	6/ 8/ 12
Plunge capacity (mm)	66
No load speed (rpm)	10,000 - 20,000
Weight (kg)	6.2
Supplied in	-
Article Number	4935403665
EAN Code	4002395125869



PLANER


PL 750

Features

- Powerful 750 watt motor
- Left and right chip ejection for greater convenience
- Heel shoe protects the base, blade and work surface
- 0.2 mm stage depth adjustment setting for greater control and accuracy
- Depth scale indicator
- Supplied with 2 blades, edge guide, dust bag and a key

Specifications

	PL 750
Power input (W)	750
No load speed (rpm)	17,000
Max. cutting depth (mm)	2
Cutting width (mm)	82
Rebate depth (mm)	12
Weight (kg)	2.9
Supplied in	-
Article Number	4935419140
EAN Code	4002395130481

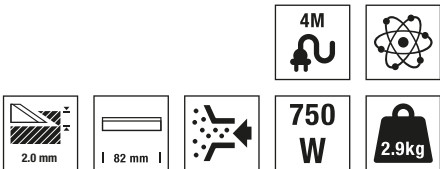

For further technical specifications, including noise and vibration data, please visit our website: [www.aeg-powertools.com](http://www.aeg-powertools.com)


RECIPROCATING SAW

Features

- Powerful 900 W motor, for fast cuts in various materials
- Pendulum function with 19 mm stroke length, for more powerful and faster cutting progress
- Speed regulation from 0 – 3500 spm, especially needed for heat-sensitive materials
- FIXTEC - for fast and easy keyless blade change
- 24 % lighter than other saws, for better work control
- One hand blade insertion
- Soft grip handle, for better ergonomics
- Supplied with a 4 m cable and 2 blades

Specifications

	US 900 XE
Power input (W)	900
No load stroke rate (spm)	0 - 3500
Stroke length (mm)	19
Weight (kg)	2.9
Supplied in	Tool bag
Article Number	4935419610
EAN Code	4002395193806

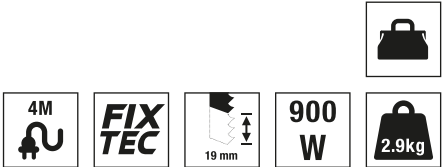


RECIPROCATING SAW

Features

- Powerful 1300 watt motor
- FIXTEC blade clamp for fast and easy blade changes
- Variable speed switch for increased cutting control and efficiency
- Adjustable shoe for prolonged blade life
- Ergonomic soft grip handle design for comfort
- Blades can be turned 180° for various applications
- Supplied with a 4 m cable and 2 blades

Specifications

	US 1300 XE
Power input (W)	1300
No load stroke rate (spm)	0 - 2800
Stroke length (mm)	30
Weight (kg)	3.8
Supplied in	Kitbox
Article Number	4935413235
EAN Code	4002395197675

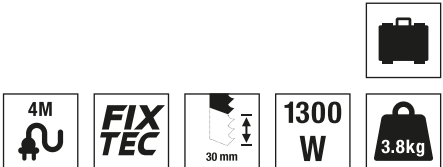

PALM DELTA SANDER

Features

- Extremely compact 260 watt sheet sander
- Ideal for working in confined spaces and over head
- Delta base for sanding in corners
- Hook & loop and large release tabs for convenient paper changing
- Magnesium base for more stability and less vibration
- Dust extraction with dust bag or absorption system
- Soft-grip on handle
- Supplied with a 4 m cable, 3 sheets (60, 80, 120 grit) sanding pad, delta base plate and dust bag

Specifications

	FDS 140
Power input (W)	260
No load speed (rpm)	14.000
Oscillation rate (opm)	20.000
Oscillation diameter (mm)	1.6
Sanding pad size (mm)	115 x 140
Weight (kg)	1.5
Supplied in	-
Article Number	4935416090
EAN Code	4002395129768



1/2 SHEET SANDER

Features

- Powerful 500 watt motor
- Variable speed for optimum control
- Convenient hook & loop paper fastening
- Dust extraction, with dustbag or absorption system
- Supplied with a 4 m cable, 3 sheets (80, 120, 240 grit) sanding pads, dust bag and aommel handle

Specifications

	FS 280
Power input (W)	500
Oscillation rate (opm)	14.000 - 26.000
Sanding pad size (mm)	115 x 280
Weight (kg)	3.0
Supplied in	-
Article Number	4935419280
EAN Code	4002395133116





RANDOM ORBIT SANDER

EX 150 ES

Features

- Dual orbits for control of material removal
- Variable speed for optimum control
- Soft start and pad brake for a gauge free workpiece
- Through-body sealed slide switch for reliability and ease of use
- Convenient hook & loop paper fastening
- Dust extraction, with dust bag or absorption system
- Diecast construction for strength and durability
- Micro texture grip for perfect handling
- Supplied with a 4 m cable, 3 x 80 grit sanding pads, dust bag and a pommel handle



Specifications

	EX 150 ES
Power input (W)	440
No load speed (rpm)	4000-10,000
Oscillation rate (opm)	8000-20,000
Oscillation diameter (mm)	3.2/ 6.4
Sanding pad size (mm)	150
Weight (kg)	2.8
Supplied in	-
Article Number	4935443290
EAN Code	4002395135479



RANDOM ORBIT SANDER

EX 125 ES

Features

- Ergonomic & compact 300 watt random orbit sander
- Ideal for working in confined spaces and over head
- Variable speed for optimum control
- Pad brake control: pad brake for a gauge free workpiece
- Convenient hook & loop paper fastening
- Very efficient dust extraction over 8 holes in the base plate
- Dust extraction, with dust bag or absorption system
- Soft-grip on handle
- Supplied with a 4 m cable, sheets (80, 120, 180 grit) sanding pads and a dust bag



Specifications

	EX 125 ES
Power input (W)	300
No load speed (rpm)	7000 - 12,000
Oscillation rate (opm)	14.000 - 24.000
Oscillation diameter (mm)	2,4
Sanding pad size (mm)	125
Weight (kg)	1.7
Supplied in	-
Article Number	4935416100
EAN Code	4002395129799



For further technical specifications, including noise and vibration data, please visit our website: [www.aeg-powertools.com](http://www.aeg-powertools.com)

BELT SANDER

HBS 1000 E


Features

- Powerful 1010 watt motor
- Electronic speed for control and optimum results
- Clamping lever for easy, tool free changing of sanding belt
- Externally accessible brushes for easy replacement
- Control wheel for precise adjustment of sanding belt
- Compact design, ideal for sanding close to edges
- Die-cast construction for high strength and durability
- Dust extraction, with dust bag or absorption system
- Supplied with a 4 m cable, 1 x 80 grit sanding belt, dust bag and a pommel handle



Specifications

	HBS 1000 E
Power input (W)	1010
Belt length (mm)	533
Belt speed (rpm)	240 - 450
Sanding surface (mm)	75 x 145
Belt width (mm)	75
Weight (kg)	5.1
Supplied in	Kitbox
Article Number	4935413205
EAN Code	4002395197613

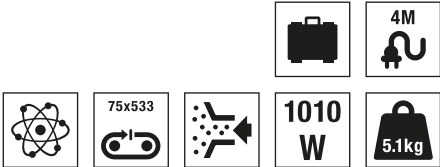

BELT SANDER

BBSE 1100

Features

- Powerful 1100 watt motor
- Extra-large sanding surface 100 x 140 mm
- Full-wave electronics with pre-selection of belt speed
- Control wheel for precise adjustment of belt alignment
- Dust extraction, with dust bag or absorption system
- Supplied with a 4 m cable, 1 x 100 grit sanding belt and a dust bag



Specifications

	BBSE 1100
Power input (W)	1100
Belt speed (rpm)	230 - 400
Belt length (mm)	560
Belt width (mm)	100
Sanding surface (mm)	100 x 140
Weight (kg)	5.0
Supplied in	-
Article Number	4935413530
EAN Code	4002395199037



For further technical specifications, including noise and vibration data, please visit our website: [www.aeg-powertools.com](http://www.aeg-powertools.com)

HEAT GUN

HG 560

Features

- 2 temperature adjustment modes 300° / 560°
- 253 - 420 l/min
- Reinforced fan for continuous use
- Extremely light product - 0.85 kg
- Rubber overmold on back end for safe stationary use

Specifications

	HG 560 D
Power input (W)	1500
Air flow (l/min)	253 - 420
Temperature range (°C)	300 / 560
Weight (kg)	0.85
Supplied in	-
Article Number	4935441015
EAN Code	4002395134991



1500  
W

0.85kg

HEAT GUN

HG 600

Features

- Electronic precise adjustment for temp from 90° up to 600°
- 345 - 434 l/min
- Reinforced fan for continuous use
- Extremely light product - 0.9 kg
- Rubber overmold on back end for safe stationary use

Specifications

	HG 600 V	HG 600 VK
Power input (W)	2000	2000
Air flow (l/min)	345 - 434	345 - 434
Temperature range (°C)	90 - 600	90 - 600
Weight (kg)	0.9	0.9
Supplied in	-	Kitbox
Article Number	4935441025	4935441035
EAN Code	4002395135011	4002395135035



2000  
W

0.9kg

TABLESAW

TS 250 K

Features

- Powerful 1800 watt motor
- 4800 rpm for effortless accurate cutting
- 90 mm cutting depth (62 mm at 45°)
- Dual clamping parallel fence for high stability and accuracy
- Overload protection ensures durability
- Soft start
- Integrated table side extension up to 645 mm gives huge cutting capacity
- Collapsible stand with wheels and height adjustment for easy transportation and portability
- On board storage for all tools and spare blades
- Supplied with a 36 tooth TCT blade, rip fence, mitre gauge and fence, collapsible stand with wheels, push stick and a wrench

Specifications

	TS 250 K
Power input (W)	1800
Blade diameter (mm)	254 x 30
No load speed (rpm)	4800
Mitre capacity (°)	45°
Max. cutting depth 45/90° (mm)	62/90
Weight (kg)	41.0
Supplied in	-
Article Number	4935419265
EAN Code	4002395133093



1800  
W

41 kg



SLIDING COMPOUND MITRE SAW


PS 305 DG

Features

- Powerful 1800 watt motor delivers 4400 rpm
- Large cutting capacities include a massive maximum crosscut of 343 x 111 mm at 90°
- Double bevel 0–47° left or right
- Mitres 60° left or right, perfect for awkward mitres
- Rugged cast construction with huge table area
- Cam operated mitre lock for fast angle adjustment
- Supplied with a 60 tooth 305 mm blade

Specifications

	PS 305DG
Power input (W)	1800
Blade diameter (mm)	305
No load speed (rpm)	4400
Mitre capacity left (°)	60
Mitre capacity right (°)	60
Max. cutting depth (mm)	111
Mitre saw capacity 90° (mm)	343
Weight (kg)	31.0
Supplied in	–
Article Number	4935411570
EAN Code	4002395126002

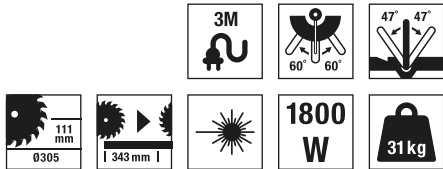

SLIDE MITRE SAW

PS 216 L

Features

- Internal fan that removes 80% of the dust
- Cut line visibility - Adjustable LED and laser
- Blade depth adjustment: Allows for trenching applications
- Mitre lock with detent plate
- Mitre: 50° left or right
- Powerful 1500 watt motor delivers 5.000 RPM
- Supplied with a 48 tooth blade, clamp, hose, bucket cover and a dust bag

Specifications

	PS 216 L
Power input (W)	1500
Blade diameter (mm)	216
No load speed (rpm)	5000
Mitre capacity left (°)	50
Mitre capacity right (°)	50
Max. cutting depth (mm)	65
Mitre saw capacity 90° (mm)	65 x 305
Max. cutting capacity 0 mitre/ 90 bevel [mm]	65 x 305
Max. cutting capacity 45° mitre/ 90° bevel [mm]	65 x 215
Max. cutting capacity 0 mitre/ 45 bevel [mm]	36 x 305
Max. cutting capacity 45° mitre/ 45° bevel [mm]	36 x 215
Weight (kg)	16.5
Supplied in	–
Article Number	4935440650
EAN Code	4002395134656



For further technical specifications, including noise and vibration data, please visit our website: [www.aeg-powertools.com](http://www.aeg-powertools.com)

SLIDE MITRE SAW


PS 254 L

Features

- Internal fan that removes 80% of the dust
- Cut line visibility - Adjustable LED and laser
- Blade depth adjustment. Allows for trenching application
- Mitre lock with detent plate. Mitre: 50 left or right
- Powerful 2.000 watt motor delivers 5.000 RPM
- Supplied with a 48 tooth blade, clamp, hose, bucket cover and a dust bag

Specifications

	PS 254 L
Power input (W)	2000
Blade diameter (mm)	254
No load speed (rpm)	4500
Mitre capacity left (°)	50
Mitre capacity right (°)	50
Max. cutting depth (mm)	90
Mitre saw capacity 90° (mm)	305
Max. cutting capacity 0 mitre/ 90 bevel [mm]	90 x 305
Max. cutting capacity 45° mitre/ 90° bevel (mm)	90 x 215
Max. cutting capacity 0 mitre/ 45 bevel [mm]	50 x 305
Max. cutting capacity 45° mitre/ 45° bevel (mm)	50 x 215
Weight (kg)	19.5
Supplied in	–
Article Number	4935440670
EAN Code	4002395134687

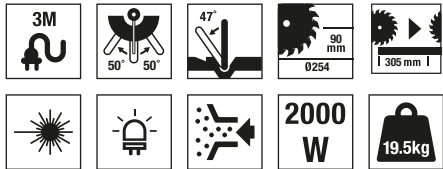

UNIVERSAL MITRE SAW LEGSTAND

PSU 1000

Features

- Extendable to 2,3 m
- Quick release brackets
- Adjustable leg
- Low weight 14 kg
- 180 Kg maximum load capacity

Specifications

	PSU1000
Extendable up to (mm)	2.3
Bearing force (kg)	180
Weight (kg)	14.0
Article Number	4935440850
EAN Code	4002395134892



For further technical specifications, including noise and vibration data, please visit our website: [www.aeg-powertools.com](http://www.aeg-powertools.com)

DUST EXTRACTOR

AP 300ELCP

Features

- CLEAR-PRESS: filter cleaning system
- PET filter cartridge
- Automatic operation when used with powertools
- Dust class L for dust rated up to 1 mg/m³
- Low noise fan for silent cleaning
- Wet & dry cleaning
- Fleece double wall filter bag and disposal bag
- Supplied with a tool adaptor, hand tube, 2 x extension tube, nozzle, crevice nozzle, hose 32 mm x 3.5 m, fleece filter bag, disposal bag and an accessory box

Specifications

	AP 300ELCP
Power input (W)	1500
Max. vacuum (mbar)	250
Container capacity (ml)	30
Hose diameter (mm)	32
Hose length (m)	3.5
Weight (kg)	10.0
Supplied in	–
Article Number	4935411890
EAN Code	4002395131068



DUST BUSTING POWER!!!

Clear-press filter cleaning system explained:



DUST EXTRACTOR

AP2-200 ELCP

Features

- Clear Press filters cleaning system
- “L” industry dust class
- PET Filter, with fleece filter bag
- Wet and dry cleaning
- Wet overfill protection
- Click system easy to change accessories
- Fleece double wall filter bag and disposal bag

Specifications

	AP2-200 ELCP
Power input (W)	1000
Air volume (l/min)	3600
Max. vacuum (mbar)	210
Container capacity (ml)	20
Hose diameter (mm)	32
Hose length (m)	3.5
Weight (kg)	7.5
Article Number	4935447460
EAN Code	4002395294190



AP 300 ECP

Description	Article Number	EAN Code
Filter cartridge.	4932352304	4002395369638
Filter bags.	4932352307	4002395369669
Extraction hose, anti static. 4 m long 36 mm diameter with tool adaptor.	4932352311	4002395369706
Extraction hose. 3.5 m long 32 mm diameter with tool adaptor.	4932352312	4002395369713

AP2-200 ELCP

Description	Article Number	EAN Code
Filter cartridge.	4932352303	4002395369621
Filter bags: 5 pcs.	4932352306	4002395369652
Extraction hose. 3.5 m long 32 mm diameter with tool adaptor.	4932352312	4002395369713



# ACCESSORIES RANGE

## WHERE POWER MEETS PERFORMANCE

**AEG POWERTOOLS** offer a complete range of accessories for the professional user. From drill bits to saw blades all these accessories offer reliability ease of use and performance.

**AEG**  
POWERTOOLS





BATTERIES

18 V



	L1840R	L1830R	L1820R	L1815R	B1814G
Battery type	Li-ion	Li-ion	Li-ion	Li-ion	NiCd
Battery pack capacity (Ah)	4.0	3.0	2.0	1.5	1.4
Charger compatibility	AL 1218G,AL 9618	AL 9618,BL 1218	AL 9618,BL 1218	AL 9618,BL 1218	AL 9618,BL 1218
Article Number	4932430170	4932352655	4932430169	4932352654	4932352533
EAN Code	4002395378319	4002395373130	4002395378302	4002395373123	4002395371914

14.4 V



	L1430R GEN II	L1420R	L1415R	B1414G
Battery type	Li-ion	Li-ion	Li-ion	NiCd
Battery pack capacity (Ah)	3.0	2.0	1.5	1.4
Charger compatibility	AL 9618,BL 1218,AL 1218G	AL 9618,BL 1218,AL 1218G	AL 9618,BL 1218,AL 1218G	BL 1218,AL 9618,AL 1218G
Article Number	4932352657	4932430167	4932352656	4932352531
EAN Code	4002395373154	4002395378289	4002395373147	4002395371891

12 V



	L1240	L1230	L1220	L1215	L1215R	M1230R	B1214G
Battery type	Li-ion	Li-ion	Li-ion	Li-ion	Li-ion	NiMH	NiCd
Battery pack capacity (Ah)	4.0	3.0	2.0	1.5	1.5	3.0	1.4
Charger compatibility	LL 1230	LL 1230	LL 1230	LL 1230	AL 9618,BL 1218	AL 9618,BL 1218	AL 9618,BL 1218
Article Number	4932430166	4932352824	4932430165	4932352658	4932430365	4932352107	4932352532
EAN Code	4002395378272	4002395374823	4002395378265	4002395373161	4002395380268	4002395367603	4002395371907

3.6 V



	SL 3.6
Battery type	Li-ion
Battery pack capacity (Ah)	1.5
Charger compatibility	LA 036
Article Number	4932352969
EAN Code	4002395376278

CHARGERS

	Battery type	Charging range	Charging time	Article Number	EAN Code
AL1214G	Li-ion, NiCd, NiMH	12 - 14.4 V	60 min	4932352481	4002395371402
AL1218G	Li-ion, NiCd, NiMH	12 - 18 V	60 min	4932352528	4002395371860
BL 1218 GEN II	Li-ion, NiCd, NiMH	12 - 18 V	30 min	4932352659	4002395373178
LL1230	Li-ion	12 V	30 min	4932352096	4002395367498
LA 036	Li-ion, NiCd, NiMH	3.6 V	30 min	4932352097	4002395367504

POWER SET SDS-PLUS DRILL BITS

- High quality 2 cutter carbide top with 130° tip angle
- The carbide tip is set deeper into the head for a more precise fit and better durability
- 2 flute geometry for rapid material removal
- Surface treated flute eliminates binging for faster drilling and high abrasion resistance
- High quality robust and compact power set with secure lock
- Made in Germany

	Article Number	EAN Code
Counter display (12 sets) SDS-Plus	4932352315	4002395369744
Single Power Set SDS-Plus Drill Bits (8pcs)  with Ø 5/6/8 x 110 mm and Ø 6 (2pcs)/8/10/12 x 160 mm	4932352236	4002395368952



POWER SET STONE DRILL BITS

- Extra sharp diamond ground carbide tip with 130 degree angle
- Polished silver and black finish eliminates binding for faster cutting and material removal
- Made from special alloy steel for best precision and robustness
- High quality robust and compact power set with secure lock

	Article Number	EAN Code
Counter display (6 sets) Stone	4932352238	4002395368976
Single Power Set Stone Drill Bits (10pcs)  Contents: Ø 4/5/5.5/6 (2pcs)/7/8 (2pcs)/9/10 mm	4932352239	4002395368983



POWER SET HSS-R (DIN 338) METAL DRILL BITS

- HSS-Rollforged metal drill bits manufactured according to DIN 338
- Oxide coating for improved swarf removal
- Normal point cutting tip with 118 degree angle
- Standard type N flute design
- High quality robust and compact power set with secure lock

	Article Number	EAN Code
Counter display (6 x sets) HSS-R	4932352240	4002395368990
Single Power Set HSS-R Drill Bits (19pcs)  Contents: Ø 2 x 49 mm / Ø 2.5 (2pcs) x 57 mm/ Ø 3 (2pcs) x 61 mm/ Ø 3.5 (2pcs) x 70 mm/ Ø 4 (2pcs) x 75 mm/ Ø 4.5 (2pcs) x 80 mm/ Ø 5 (2pcs) x 86 mm/ Ø 6 (2pcs) x 93 mm/ Ø 7 x 109 mm/ Ø 8 x 117 mm/ Ø 9 x 125 mm/ Ø 10 x 133 mm	4932352241	4002395369003



POWER SET HSS-G (DIN 338) METAL DRILL BITS

- Fully ground drill bits according to DIN 338
- Standard tip for cutting geometry with 118° angle
- Standard type N flute design for faster chip removal and faster cutting
- High quality robust and compact powere set with secure lock

	Article Number	EAN Code
Counter display (6 x sets) HSS-G	4932352242	4002395369010
Single Power Set HSS-G Drill Bits (19pcs)  Contents: Ø 2 x 49 mm / Ø 2.5 (2pcs) x 57 mm/ Ø 3 (2pcs) x 61 mm/ Ø 3.5 (2pcs) x 70 mm/ Ø 4 (2pcs) x 75 mm/ Ø 4.5 (2pcs) x 80 mm/ Ø 5 (2pcs) x 86 mm/ Ø 6 (2pcs) x 93 mm/ Ø 7 x 109 mm/ Ø 8 x 117 mm/ Ø 9 x 125 mm/ Ø 10 x 133 mm	4932352243	4002395369027





POWER SET HSS-G TIN DRILL BITS

- Metal drill bits ground from high speed steel according to DIN 338
- Normal point cutting tip with 118° angle
- Standard type N flute design
- Titanium nitride coating increases cutting speed by 50% and lifetime by 300%
- High quality robust and compact power set with secure lock

	Article Number	EAN Code
Counter display (6 x sets) HSS-G TiN	4932352244	4002395369034
Single Power Set HSS-G TiN Drill Bits (19pcs)		
Contents: Ø 2 x 49 mm / Ø 2.5 (2pcs) x 57 mm/ Ø 3 (2pcs) x 61 mm/ Ø 3.5 (2pcs) x 70 mm/ Ø 4 (2pcs) x 75 mm/ Ø 4.5 (2pcs) x 80 mm/ Ø 5 (2pcs) x 86 mm/ Ø 6 (2pcs) x 93 mm/ Ø 7 x 109 mm/ Ø 8 x 117 mm/ Ø 9 x 125 mm/ Ø 10 x 133 mm	4932352245	4002395369041



POWER SET LIP & SPUR WOOD DRILL BITS

- Manufactured from chrome vanadium steel according to DIN 7487 E
- Center point guarantees precise positioning
- Sharpened shoulders provide for clean holes avoiding splintering
- High quality robust and compact power set with secure lock

	Article Number	EAN Code
Counter display (6x sets) Lip and Spur Wood	4932352246	4002395369058
Single Power Set Lip & Spur Wood Drills Bits (8 pcs)		
Contents: Ø 3 x 60 mm / Ø 4 x 75 mm/ Ø 5 x 85 mm/ Ø 6 x 97 mm/ Ø 7 x 104 mm/ Ø 8 x 117 mm/ Ø 9 x 120 mm/ Ø 10 x 133 mm	4932352247	4002395369065



POWER SET HSS-G (DIN 338) METAL DRILL BITS & SCREWDRIVING BITS

- Metal drill bits ground from high speed steel according to DIN 338
- Normal point cutting tip with 118° angle
- Standard type N flute design
- Screwdriving bits are milled from S2 steel
- High quality robust and compact power set with secure lock

	Article Number	EAN Code
Counter Display (6 x sets) HSS-G & Screwdriving Bits	4932352248	4002395369072
Single Power Set HSS-G & Screwdriving Bits (35pcs)		
Contents: Ø 2/ 2.5/ 3/ 3.2/ 3.5/ 4/ 4.5/ 6/ 8/ 10mm 25mm length: PH1 (2pcs)/ PH2 (2pcs)/ PH3 (2pcs)/ PZ1 (2pcs)/ PZ2 (2pcs)/ PZ3 (2pcs)/ TX10 (2pcs)/ TX15 (2pcs)/ TX20 (2pcs)/ TX25 (2pcs)/ TX30/ TX40 50mm length: PH2/ PZ2 ¼" Hex magnetic bit holder	4932352249	4002395369089



POWER SET JIGSAW BLADES FOR WOOD & METAL

- Wood applications:
- T144D - Fast cutting
- T101B - Very clean, splinter free cutting
- Metal applications:
- T118A - Cutting of thin sheet material Ø 1.5-4 mm
- T118B - cutting of thicker material 3-6 mm
- High quality robust and compact power set with secure lock

	Article Number	EAN Code
Counter display (6 x sets) Jigsaw Blades	4932352252	4002395369119
Power Set 50pcs - jigsaw blades for wood and metal		
10 x T 144 D/ 10 x T 101 B/ 15 x T 118 A/ 15 x T 188 B	4932352253	4002395369126



POWER SET SCREWDRIVING BITS

- COLDfire® is a special hardening treatment for making metal stronger, tougher and more durable. This cryogenic process is a one-time permanent treatment affecting the entire screwdriving bit and it is not just a surface coating. The cryogenic process consists of two steps, firstly the bit is hardened by heating it up to 870° and then freezing the bit down to -148° using a dry nitrogen atmosphere. The result of this process is a bit with exceptional durability
- + 40% stronger - bit tips hold their form and will accept higher torque forces
- + 45% longer life - over the lifetime of a bit one can expect to drive 45% more screws



	Article Number	EAN Code
Counter display (6x sets) Screwdriving Bits	4932352254	4002395369133
Single Power Set Screwdriving Bits (40pcs)		
Contents: 25mm length: PH1 / PH2 (2pcs)/ PH3 / PZ1 (2pcs)/ PZ2 (2pcs)/ PZ3 (2pcs)/ TX6/ TX7 TX 8/ TX9/ TX10 (2pcs)/ TX15 (2pcs)/ TX20 (2pcs)/ TX25 (2pcs)/ TX30/ TX40/ Hex 3/ Hex 4/ Hex 5/ Hex 6/ SL 0.6 x 4.5/ SL 0.8 x 5.5/ SL 1.0 x 5.5/ SL 1.2 x 6.5 50mm length: PH1/ PH2/ PZ1/ PZ2/ TX10/ TX15/ TX20 ¼" Hex magnetic bit holder	4932352255	4002395369140



PROFI-BOX HSS-R (DIN 338) METAL DRILL BITS

- HSS-Rollforged metal drill bits manufactured according to DIN 338
- 118° cutting tip angle
- Oxide coating for improved swarf removal
- Robust metal box

	Article Number	EAN Code
Counter display (10 x sets) HSS-R	4932352460	4002395371198
Single Profi-Box HSS-R Drill Bits (19pcs)		
Contents: Ø 1-10 mm in 0.5 mm incrementals	4932352459	4002395371181



MAXI-MIX DRILL BITS

- Contains a mixed assortment of drill bits for drilling wood, metal and masonry/stone (18 pieces in total)
- Robust metal box

	Article Number	EAN Code
Counter display (10 x sets) Maxi-Mix Drill Bits	4932352464	4002395371235
Single Maxi-Mix Drill Bits (18pcs)		
Contents: Stone drill bits: Ø 3/4/5/6/8/10 mm HSS-R drill bits: Ø 3/4/5/6/8/10 mm Wood drill bits: Ø 3/4/5/6/8/10 mm	4932352463	4002395371228



WB1 - SCREWDRIVER ANGLE ATTACHMENT WITH 10 SCREWDRIVING BITS

- Contents: WB1 and crewdriving bits 25 mm PH1/ PH2/ PZ1/ PZ2 (2pcs)/ PZ3/ TX15/ TX20/ Hex 4/ Hex 5
- Being only 30 mm high it is ideally suited to working in confined and limited spaces
- Fits to all machines. The ¼" Hex shank fits directly into the chuck preventing slippage
- Magnetic ¼" Hex reception. Accepts ¼" Hex screwdriving bits
- Adjustable to working situation. 360° variable thumb lever for extra grip
- Industrial quality up to 11 Nm torque and 400 min<sup>-1</sup>
- Tough gears made of special hardened steel



	Article Number	EAN Code
Counter display (10 x WB1 Sets)	4932430174	4002395378357
Single WB1		
Contents: Screwdriver angle attachment with 10 screwdriving bits	4932430173	4002395378340

MAXI-BIT SCREWDRIVING SET

	Article Number	EAN Code
Counter display (20 x sets) & Screwdriving Bits	4932399494	4002395361144
Single Maxi-Bit Set Screwdriving Bits (10pcs)		
Contents: SL 0.6 x 4.5/ SL 0.8 x 5.5/ SL 1.5 x 6.5/ PH1/ PH2/ PH3/ PZ1/ PZ2/ PZ3 ¼" Hex magnetic bit holder	4932399493	4002395361151



PROFI-BIT SCREWDRIVING SET

	Article Number	EAN Code
Counter Display (17 x Sets) Screwdriving Bits	4932399496	4002395361168
Single Profi-Bit Set Screwdriving Bits (17pcs)		
Contents: SL 0.8 x 5.5/ SL 1.2 x 6.5/ PH1/ PH2 (2pcs)/ PH3/ PZ1/ PZ2 (2pcs)/ PZ3/ TX10/ TX15/ TX20/ TX25/ TX30/ TX40 ¼" Hex magnetic bit holder	4932399495	4002395361175



FIXTEC NUTS

- FIXTEC: Disc changing in seconds, no extra tools required
- 12 seconds from removing the worn disc to fixing a new disc
- Only 8 mm thin, enabling more surface of sic on the material
- Compatible to all manufactures angle grinders up to 150 mm with standard M14 spindle thread
- With integrated keyholes, for removal of the nut with a standard pin spanner in the event of the nut becoming too tight



	Article Number	EAN Code
Counter display ( 12 x FIXTEC Nut)	4932358936	4002395326693
Single FIXTEC Nut	4932358225	4002395325528

SDS-PLUS DRILL BITS - 2 CUT / 10 PIECE POWER PACKS


- High quality 2 cutter carbide tip with 130 degree tip angle
- The carbide tip is set deeper into the head for a more precise fit and better durability
- 2 flute geometry for rapid material removal
- Surface treated eliminates binding for faster drilling and high abrasion resistance
- Made in Germany

Ø (mm)	Total length A (mm)	Working length B (mm)	Quantity	Article Number	EAN Code
5	110	50	10	4932352256	4002395369157
5.5	110	50	10	4932352257	4002395369164
6	110	50	10	4932352258	4002395369171
6	160	100	10	4932352259	4002395369188
7	160	100	10	4932352260	4002395369195
8	110	50	10	4932352261	4002395369201
8	160	100	10	4932352262	4002395369218
8	210	150	10	4932352263	4002395369225
10	160	100	10	4932352264	4002395369232
10	210	150	10	4932352265	4002395369249
10	260	200	10	4932352266	4002395369256
12	160	100	10	4932352267	4002395369263
12	210	150	10	4932352268	4002395369270
Single Power Set SDS-Plus Drill Bits (8pcs) with Ø 5/6/8 x 110 mm and Ø 6 (2pcs)/8/10/12 x 160 mm				4932352236	4002395368952
SDS-plus Starter Set with Ø 6/8/10 x 160mm, point chisel and flat chisel				4932352653	4002395373116




SDS MAX DRILLS - 2 CUT

Ø (mm)	Total length A (mm)	Working length B (mm)	Quantity	Article Number	EAN Code
16	540	400	1	4932352687	4002395373451
18	540	400	1	4932352688	4002395373468
20	520	400	1	4932352689	4002395373475
22	520	400	1	4932352690	4002395373482
25	520	400	1	4932352691	4002395373499
28	570	450	1	4932352692	4002395373505
30	570	450	1	4932352693	4002395373512
32	570	450	1	4932352694	4002395373529




SDS-PLUS CHISELS

Description	Length (mm)	Width (mm)	Quantity	Article Number	EAN Code
Point chisel	200	-	1	4932352269	4002395369287
Flat chisel	200	20	1	4932352270	4002395369294
Wide chisel	200	35	1	4932352271	4002395369300
Set of 3 SDS-plus chisels with 1 pointed, 1 flat, 1 wide chisel				4932352272	4002395369317

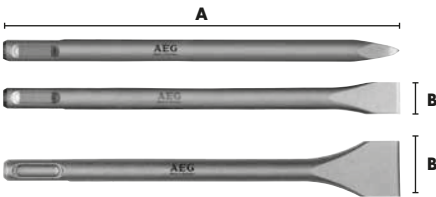

SDS MAX CHISELS

Description	Length (mm)	Width (mm)	Quantity	Article Number	EAN Code
Point chisel	400	-	1	4932352685	4002395373437
Flat chisel	400	25	1	4932352686	4002395373444



ROUTER BIT SET

Description	Quantity	Article Number	EAN Code
8 mm shank	12	4932354236	4002395320639





MULTIMIX SET 75 PCS - DRILLING AND SCREWDRIVING SET

	Article Number	EAN Code
Contents: Screwdriving bits 25 mm length 1 x PH 0/ 1 x PH 1/ 3 x PH 2/ 1 x PH 3/ 1 x PZ 0/ 1 xPZ 1/ 3 x PZ 2/ 1 x PZ 3/ 1 x SQ 1/ 1 x SQ 2/ 1 x SQ 3/ 1 x TX 10/ 1 x TX 15/ 1 x TX 20/ 1 x TX 25/ 1 x TX 30/ 1 x TX 40/ 1 x Hex 4/ 1 x Hex 5/ 1 x Hex 6/ 1 x SL 3/ 1 x SL 4/ 1 x SL 4/ 1 x SL 5/ 1 x SL 6/ 1 x SL7/ 1 x SL 8 ¼" Hex magnetic bit holder  Screwdriving bits 50 mm length 1 x PH 2/ 1 x PZ 2/ 1 x SL 4/ 1 x SL 6/ 1 x SL 8  Nut drivers 1 x 5 mm/ 1 x 6 mm/ 1 x 7 mm/ 1 x 8 mm/ 1 x 10 mm/ 1 x 12 mm  Metal drill bits HSS-R DIN 338 2 x 1 mm/ 1 x 1.5 mm/ 1 x 2 mm/ 1 x 2.5 mm/ 1 x 3 mm/ 1 x 3.5 mm/ 1 x 4 mm  Lip & Spur wood drill bits 3 x 3 mm/ 3 x 4 mm/ 2 x 5 mm/ 1 x 6 mm/ 1 x 7 mm/ 1 x 8 mm/ 1 x 10 mm/  Countersink with ¼" Hex reception 45°  Masonry drill bits 1 x 4 mm/ 1 x 5 mm/ 1 x 5.5 mm/ 3 x 6 mm/ 1 x 6.5 mm/ 2 x 7 mm/ 1 x 8 mm/ 1 x 10 mm/ 1 x 12 mm	<b>4932352670</b>	4002395373284



DRILL AND DRIVE 50PCS SET

	Article Number	EAN Code
HSS-Ground Metal Drill Bits 1 x 2 mm/ 1 x 2.5 mm/ 1 x 3 mm/ 1 x 3.5 mm/ 1 x 4 mm/ 1 x 4.5 mm/ 1 x 5 mm/ 1 x 5.5 mm/ 1 x 6 mm  Stone Drill Bits 1 x 5 mm/ 1 x 5.5 mm/ 1 x 6 mm/ 1 x 7 mm/ 1 x 8 mm/ 1 x 8 mm/ 1 x 9 mm/ 1 x 10 mm  Nut Drivers 1 x Hex 6/ 1 x Hex 8/ 1 x Hex 10  Lip & Spur Wood Drill Bits 1 x 4 mm/ 1 x 5 mm/ 1 x 6 mm/ 1 x 7 mm/ 1 x 8 mm  Flat Boring Bits 1 x 16 mm/ 1 x 18 mm  Screwdriving bits 25 mm bits (1 of each) SL 0.6 x 4.5/ SL 0.8 x 5.5/ PH 1/ PH 2/ PH 3/ PZ 1/ PZ 2/ PZ 3/ TX 10/ TX 15/ TX 20/ TX 25/ TX 30/ TX 35/ TX 40/ Hex 4/ Hex 5/ Hex 6 50 mm bits PH 1/ PZ 2 Magnetic bit holder	<b>4932430411</b>	4002395380725



METAL DRILL BITS HSS-G COBALT (DIN 338)

- Metal drill bits ground from solid extremely heat resistant cobalt-alloyed high speed steel produced according to DIN 338. Polished finish. Split point shaped cutting tip with 135° angle for improved centering - no center punched required.
- 5% Cobalt content. Withstands high drilling heat.
- Type N flute normal angle.
- Suitable for drilling high alloy content steels and metals with tensile strengths of over 1000 N/mm like heat and acid proof steels and stainless steel.
- Colour: bronze.


Ø (mm)	Total length A (mm)	Working length B (mm)	Quantity	Article Number	EAN Code
2.0	49	24	2	<b>4932430416</b>	4002395380770
3.0	61	33	2	<b>4932430417</b>	4002395380787
3.2	65	36	2	<b>4932430418</b>	4002395380794
4.0	75	43	2	<b>4932430419</b>	4002395380800
4.8	86	52	1	<b>4932430420</b>	4002395380817
5.0	86	52	1	<b>4932430421</b>	4002395380824
6.0	93	57	1	<b>4932430422</b>	4002395380831
7.0	109	69	1	<b>4932430423</b>	4002395380848
8.0	117	75	1	<b>4932430424</b>	4002395380855
9.0	125	81	1	<b>4932430425</b>	4002395380862
10.0	133	87	1	<b>4932430426</b>	4002395380879
11.0	142	94	1	<b>4932430427</b>	4002395380886
12.0	151	101	1	<b>4932430428</b>	4002395380893
13.0	151	101	1	<b>4932430429</b>	4002395380909



MASONRY DRILL BITS

- Carbide tip with diamond ground cutting edges with 130° angle - For drilling in brick and aerated conret blocks

Ø (mm)	Total length A (mm)	Working length B (mm)	Quantity	Article Number	EAN Code
4	75	40	1	<b>4932363591</b>	4002395332410
5	85	50	1	<b>4932363593</b>	4002395332434
5.5	85	50	1	<b>4932363595</b>	4002395332458
6	100	60	1	<b>4932363597</b>	4002395332472
6	150	85	1	<b>4932367032</b>	4002395333967
7	100	60	1	<b>4932363599</b>	4002395332496
8	120	80	1	<b>4932363600</b>	4002395332502
8	200	135	1	<b>4932363612</b>	4002395332366
10	120	80	1	<b>4932363602</b>	4002395332526
10	200	135	1	<b>4932363613</b>	4002395332373
12	150	85	1	<b>4932363604</b>	4002395332540
<b>Single Power Set Stone Drill Bits (10pcs)</b>				<b>4932352239</b>	4002395368983
Contents: Ø 4/5/5.5/6 (2pcs)/7/8 (2pcs)/9/10 mm					

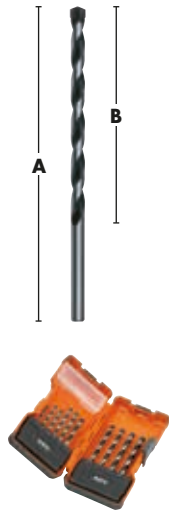








HIGH PERFORMANCE BI-METAL HOLESAWS / SYSTEM ACCESSORIES

Ø (mm)	Ø (inch)	Article Number	EAN Code	Ø (mm)	Ø (inch)	Article Number	EAN Code
14	½	<b>4932367244</b>	4002395335947	57	2 ¼	<b>4932367266</b>	4002395336173
16	⅝	<b>4932367245</b>	4002395335954	60	2 ⅜	<b>4932367267</b>	4002395336180
19	¾	<b>4932367247</b>	4002395335978	64	2 ½	<b>4932367268</b>	4002395336197
20	25/32	<b>4932367248</b>	4002395335985	65	2 ⅞	<b>4932367269</b>	4002395336203
21	13/16	<b>4932367249</b>	4002395335992	68	2 11/16	<b>4932371580</b>	4002395345250
22	7/8	<b>4932367250</b>	4002395336005	70	2 ¾	<b>4932367271</b>	4002395336227
24	15/16	<b>4932367251</b>	4002395336012	73	2 7/8	<b>4932367272</b>	4002395336234
25	1	<b>4932367252</b>	4002395336029	76	3	<b>4932367273</b>	4002395336241
27	1 1/16	<b>4932367253</b>	4002395336036	79	3 ⅛	<b>4932367274</b>	4002395336258
29	1 ⅛	<b>4932367289</b>	4002395336043	83	3 ¼	<b>4932367275</b>	4002395336265
30	1 3/16	<b>4932367254</b>	4002395336050	89	3 ½	<b>4932367277</b>	4002395336289
32	1 ¼	<b>4932367255</b>	4002395336067	92	3 ⅝	<b>4932367278</b>	4002395336296
35	1 ⅜	<b>4932367256</b>	4002395336074	98	3 7/8	<b>4932367280</b>	4002395336319
38	1 ½	<b>4932367257</b>	4002395336081	102	4	<b>4932367281</b>	4002395336326
40	1 9/16	<b>4932367258</b>	4002395336098	105	4 ⅛	<b>4932367282</b>	4002395336333
43	1 11/16	<b>4932367259</b>	4002395336104	114	4 ½	<b>4932367284</b>	4002395336357
44	1 ¾	<b>4932367260</b>	4002395336111	121	4 ¾	<b>4932367285</b>	4002395336364
48	1 7/8	<b>4932367262</b>	4002395336135	127	5	<b>4932367286</b>	4002395336371
51	2	<b>4932367263</b>	4002395336142	152	6	<b>4932367288</b>	4002395336395
54	2 ⅛	<b>4932367265</b>	4002395336166				

		Article Number	EAN Code
Arbor Hex 11 -5/8" x 18 - 1pc	FIXTEC arbor ⅝" x 18 11 mm Hex for holesaws Ø 32 - 152 mm	<b>4932367421</b>	4002395337422
Arbor Hex 9 -1/2"x20 - 1pc	Arbor 1½" x 20 Light duty arbor ⅞" x 20 Hex 9 for holesaws Ø 14 - 30 mm	<b>4932367422</b>	4002395337439
Pilot Drill - Long - 1pc	Pilot drill bit long For use with arbor <b>4932367421</b>	<b>4932367423</b>	4002395337446
Pilot Drill - Short - 1pc	Pilot drill bit short For use with arbor <b>4932367422</b>	<b>4932367424</b>	4002395337453



JIGSAW BLADES FOR WOOD / PLASTICS / METAL

Blade length (mm)	Tooth pitch (mm)	Ref. No.	Quantity	Description	Max. cutting capacity wood (mm)	Max. cutting capacity laminated chipboard (mm)	Max. cutting capacity parquet laminate (mm)	Max. cutting capacity PVC (mm)	Max. cutting capacity non-ferrous metals (mm)	Max. cutting capacity metal pipe Ø (mm)	Max. cutting capacity aluminium (mm)	Article Number	EAN Code
75	3	T 111 C	5	For rough cutting	5-60			< 40				4932352144	4002395367979
50	1.35	T 101 AO	5	For fast, clean, curve cutting	< 20		< 20	<15				4932352145	4002395367986
75	4	T 244 D	5	For rough, curve cutting	< 60							4932352146	4002395367993
75	4	T 144 D	5	For fast, rough cutting	< 60							4932352147	4002395368006
<div>3521 48AEG</div>													
75	2.5	T 101 B	5	For very clean, splinter free cutting	< 30	< 60		< 30				4932352148	4002395368013
<div>3521 49AEG</div>													
75	4	T 101 D	5	For fast, clean, splinter free cutting	< 60	< 60		< 45				4932352149	4002395368020
<div>3521 50AEG</div>													
55	1.2	T 118 A	5	For thin sheet metal					1.5-4	1.5-4		4932352150	4002395368037
<div>3521 51AEG</div>													
55	2	T 118 B	5	Rougher cuts in metal					3-6	3-6	3-10	4932352151	4002395368044
				12 piece set in container									
				Suitable for applications in wood, cutting worktops and laminate flooring and metals									4932373494 4002395349944
				Power Set 50pcs - jigsaw blades for wood and metal									
10 x T 144 D/ 10 x T 101 B/ 15 x T 118 A/ 15 x T 188 B												4932352253	4002395369126

LAME PER SEGA CIRCOLARE A FILO

Total length (mm)	Working length (mm)	No. of teeth	Cutting width (kerf) (mm)	Fibre cement board	Chip-board	MDF and fibre-board	Laminated chip-board	Plywood & OSB boards	Plastics	Plaster-board	Non ferrous metals profiles alu	Fine cut	Article Number	EAN Code
127	20	6	1.8	✓						✓		✓	4932352534	4002395371921
127	20	40	1.8		✓	✓	✓	✓	✓			✓	4932352535	4002395371938
160	20	48	2.2		✓	✓	✓	✓	✓			✓	4932352868	4002395375264
160	20	48	2.2						✓		✓	✓	4932352869	4002395375271
165	20	24	2.6		✓	✓	✓	✓	✓				4932430311	4002395379729
165	20	52	2.8		✓	✓	✓	✓	✓			✓	4932430312	4002395379736
184	30	24	1.8		✓	✓	✓	✓	✓			✓	4932352874	4002395375325
190	30	24	2.2		✓	✓	✓	✓	✓				4932430469	4002395381302
190	30	48	2.8		✓	✓	✓	✓	✓			✓	4932430470	4002395381319

LAME PER SEGA CIRCOLARE A BATTERIA











Total length (mm)	Working length (mm)	No. of teeth	Cutting width (kerf) (mm)	Fibre cement board	Chip-board	MDF and fibre-board	Laminated chip-board	Plywood & OSB boards	Plastics	Plaster-board	Non ferrous metals profiles alu	Fine cut	Article Number	EAN Code
165	15.8	18	1.5		✓	✓	✓	✓	✓			✓	4932430366	4002395380275

LAME PER TRONCATRICE

Total length (mm)	Working length (mm)	No. of teeth	Cutting width (kerf) (mm)	Fibre cement board	Chip-board	MDF and fibre-board	Laminated chip-board	Plywood & OSB boards	Plastics	Plaster-board	Non ferrous metals profiles alu	Fine cut	Article Number	EAN Code
216	30	48	2.4		✓	✓	✓	✓	✓				4932430721	4002395383825
254	30	48	3.2		✓	✓	✓	✓	✓				4932430471	4002395381326
254	30	80	3.2								✓	✓	4932430472	4002395381333
305	30	60	3.2		✓	✓	✓	✓	✓			✓	4932430473	4002395381340
305	30	96	3.2								✓	✓	4932430474	4002395381357



RECIPROCATING SAW BLADES FOR WOOD / PLASTICS / METAL

Blade length (mm)	Tooth pitch (mm)	Ref. No.	Quantity	Description	Article Number	EAN Code
						
150	2.5	S811H	3	For all woods, nail embedded wood, plaster board 3-100 mm, non-ferrous metals, aluminium 3-10 mm, plastic pipes	4932318127	4002395301959
						
150	4.2	S744D	2	For fast scroll cutting 6-100 mm	4932323801	4002395304240
						
150	4	S644D	2	For fast cutting of wood and plastic, plunge cutting, 6-100 mm	4932323800	4002395304233
						
240	8.5	S1542K	2	Special hardened teeth design, for fast coarse cut, as well for green and fire wood, 20-180mm	4932323804	4002395304271
						
300	4.2	S1344D	2	For cutting large timbers and plastic, clean cut, 6-250 mm	4932323802	4002395304257
						
150	1.4	S922EF	3	For all metals with a wall thickness between 1.5-4 mm	4932354792	4002395324477
						
150	1.8	S922BF	3	For all metals with a wall thickness between 3-10 mm	4932354789	4002395324446
						
230	Coarse grit	S1130R	2	For abrasive materials, fibreglass materials (polyesters, expoxies, melamines), cast iron pipes	4932373386	4002395348817
						
450	17	-	1	For abrasive materials ie. bricks, soft abrasive blocks	4932430447	4002395381081
						
300	4.2	-	1	For cutting of frozen materials	4932430448	4002395381098
400	4.2	-	1	For cutting of frozen materials	4932430449	4002395381104


GUIDE RAIL

Description	Article Number	EAN Code
<b>FSU 1400 Guide Rail</b>  1400mm long. Supplied with carry-bag. Adaptors to fix guide rail to following machines: MBS 30 requires adaptor 4931 4118 18. KS 55 C (only suitable for machines with production date after 6/2010)/ KS 66C (only suitable for machines with production date after 8/2011): 4931 41655 18, KS 55-2 and KS 66-2 requires 4931416518 adaptors/ CS 60 requires 4931416518 adaptor.	4932430067	4002395377282




ATTACHMENTS

Description	Article Number	EAN Code
<b>Xtractor - 1pc</b>  The ideal dust extraction solution. The Xtractor can be used with all household and industrial dust extraction units with a hose diameter from 26-41 mm.	4932373501	4002395351862




BLADES FOR OSCILLATING TOOL

- Universal blade reception make AEG blades compatible with most popular oscillating tools
- Every blade pack contains both washers




Description	Cutting width (mm)	Max. cutting depth (mm)	Quantity	Article Number	EAN Code
Bi-Metal plunge cutting blade Application: ① Wood, metal, PVC Plunge cutting in wood/ steel/ copper/ aluminium	28	40	1	4932430315	4002395379767
Plunge cutting blade Application: ② Wood, PVC Plunge cutting in soft and hard wood, PVC Recess cutting in wood. Flush cutting to length in wood	28	40	1	4932430316	4002395379774
Plunge cutting blade Application: Wood, PVC ③ Plunge cutting in soft and hard wood, PVC Blade sits flush when cutting in door jambs Recess cutting in wood	9	40	1	4932430317	4002395379781
Bi-Metal flush cutting blade Application: Wood, metal, PVC ④ Plunge cutting in solid wood Flush cutting in wood Cutting steel. copper/ aluminium/ metal pipes and profiles with small dimensions. Cutting PVC pipes to length	88	20	1	4932430319	4002395379804
Grout removal blade Application: ⑤ Grout, mortar, soft tiles Routing grout joints on wall and floor tiles	85	20	1	4932430318	4002395379798
9pc Set 2 x bi-metal plunge cutting blades 2 x plunge cutting blades 28 mm ⑥ 2 x plunge cutting blades 9 mm 1 x bi-metal flush cutting blade 1 x scraper 1 x grout blade			9	4932430314	4002395379750
Washer Set ⑦ To fit Bosch keyless oscillating tool To fit Dremel keyless oscillating tool			2	4931441298	4002395872541

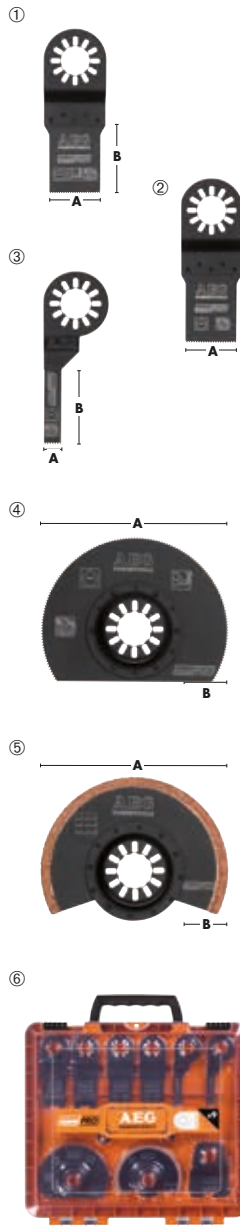

SANDING ACCESSORIES FOR OSCILLATING TOOL


Description	Grit	Dimensions (mm)	Quantity	Article Number	EAN Code
⑧ Sanding Pad		93x93	1	4932430320	4002395379811
10pc Set Sanding paper Hook & Loop 4 x Grit 60 3 x Grit 80 3 x Grit 120 ⑨ Application: Wood, PVC For sanding small areas, e.g. in corners, along edges, in restricted areas and tight spaces, sanding down of surface blemishes.	6080120	93x93	10	4932430321	4002395379828

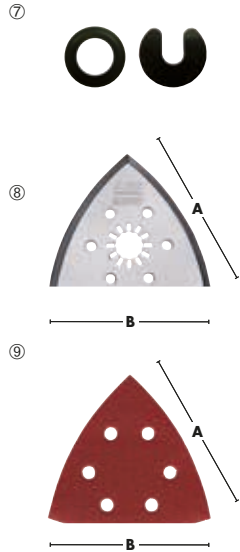

ABRASIVE PAPER- HOOK & LOOP FOR FDS 140

- Perforated sanding discs for wood, metal, paint, lacquer, plaster
- Grit type: fused alumina, half-open
- Artificial resin-bonded on special tear-resistant paper


Grit	Dimensions (mm)	Quantity	Article Number	EAN Code
60	115 x 107	10	4932352420	4002395370795
80	115 x 107	10	4932352421	4002395370801
120	115 x 107	10	4932352422	4002395370818
240	115 x 107	10	4932352423	4002395370825



ABRASIVE PAPER- CLAMP TYPE FOR FDS 140


- Perforated sanding discs for wood, metal, paint, lacquer, plaster
- Grit type: fused alumina, half-open
- Artificial resin-bonded on special tear-resistant paper

Grit	Dimensions (mm)	Quantity	Article Number	EAN Code
60	115 x 140	10	4932352424	4002395370832
80	115 x 140	10	4932352425	4002395370849
120	115 x 140	10	4932352426	4002395370856
240	115 x 140	10	4932352427	4002395370863



ABRASIVE DELTA PAPER- HOOK & LOOP FOR FDS 140

Grit	Dimensions (mm)	Quantity	Article Number	EAN Code
60	110 x 88	10	4932352925	4002395375837
80	110 x 88	10	4932352926	4002395375844
120	110 x 88	10	4932352927	4002395375851
240	110 x 88	10	4932352928	4002395375868



ABRASIVE DISCS- HOOK & LOOP- 6 HOLES


- Perforated sanding discs for wood, metal, paint, lacquer, plaster
- Grit type: fused alumina, half-open
- Artificial resin-bonded on special tear-resistant paper

Grit	Ø (mm)	Quantity	Article Number	EAN Code
40	150	5	4932430454	4002395381159
60	150	5	4932430455	4002395381166
80	150	5	4932430456	4002395381173
120	150	5	4932430457	4002395381180
180	150	5	4932430458	4002395381197
240	150	5	4932430459	4002395381203



POLISHING ACCESSORIES- HOOK & LOOP

Description	Ø (mm)	Height (mm)	Quantity	Article Number	EAN Code
Polishing backing pad Application: Reception of felt- / lambswool polishing discs and polishing sponges Characteristics: M14 thread, break resistant with integrated soft and flexible foam layer, Hook & Loop fixation	150	25	1	4932430450	4002395381111
Lambswool polishing disc Application: Finishing high gloss polishing Requires polishing backing pad Characteristics: Natural lambs wool, very soft and adaptable Hook & Loop fixation	150		1	4932430453	4002395381142
Polishing sponge - hard Application: Polish up of weather-beaten lacquer, lacquer reconditioning Requires polishing backing pad Characteristics: Medium hard, fine pored, with rounded edge, Hook & Loop fixation	150	50	1	4932430452	4002395381135
Polishing sponge- soft Application: Second polish of lacquer, lacquer care Requires polishing backing pad Characteristics: Super-soft, fine pored, with rounded edge, Hook & Loop fixation	150	50	1	4932430451	4002395381128



BASE PLATES

Description	Ø (mm)	No. of holes	Article Number	EAN Code
Base plate for EX 125 ES Complete with rubber ring as spare	125	8	4932352870	4002395375288
Base plate for EX 150 E Complete with rubber ring as spare	150	6	4932352871	4002395375295







**CORDLESS/HAMMERS/DRILLING/  
METALWORKING/WOODWORKING/  
ACCESSORIES**

**AEG POWERTOOLS** promises to draw upon its heritage and deliver exciting, high performance, innovative working solutions for the professional tradesmen of today and the future.

**AEG POWER TOOLS**

P.O. Box 320  
D-71361 Winnenden  
Germany

Tel.: +49 71 95 12-0  
Fax: +49 71 95 12-666

[www.aeg-powertools.com](http://www.aeg-powertools.com)

**EPTA**

© AEG POWERTOOLS

AEG POWERTOOLS reserve the right to change all data including images, specification and service and warranty information without notice. AEG POWERTOOLS will hold no liability for printing errors or mistakes.